openGear

SFS-8622 Series

Single Channel Frame Synchronizers with Audio Processing User Manual

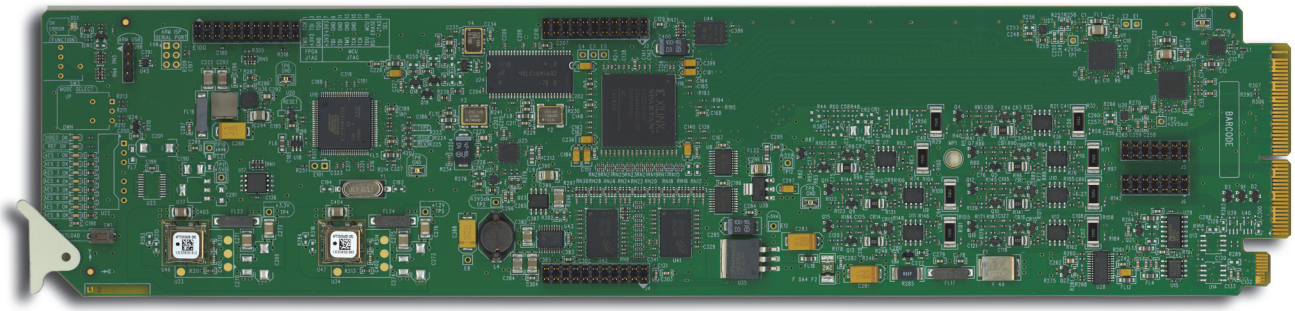

ROSS

Thank you for choosing Ross

You've made a great choice. We expect you will be very happy with your purchase of Ross Technology.

Our mission is to:

1. Provide a Superior Customer Experience
    - offer the best product quality and support
2. Make Cool Practical Technology
    - develop great products that customers love

Ross has become well known for the Ross Video Code of Ethics. It guides our interactions and empowers our employees. I hope you enjoy reading it below.

If anything at all with your Ross experience does not live up to your expectations be sure to reach out to us at *solutions@rossvideo.com*.

David Ross
CEO, Ross Video
dross@rossvideo.com

Ross Video Code of Ethics

Any company is the sum total of the people that make things happen. At Ross, our employees are a special group. Our employees truly care about doing a great job and delivering a high quality customer experience every day. This code of ethics hangs on the wall of all Ross Video locations to guide our behavior:

1. We will always act in our customers' best interest.
2. We will do our best to understand our customers' requirements.
3. We will not ship crap.
4. We will be great to work with.
5. We will do something extra for our customers, as an apology, when something big goes wrong and it's our fault.
6. We will keep our promises.
7. We will treat the competition with respect.
8. We will cooperate with and help other friendly companies.
9. We will go above and beyond in times of crisis. *If there's no one to authorize the required action in times of company or customer crisis - do what you know in your heart is right. (You may rent helicopters if necessary.)*

SFS-8622 Series User Manual

- Ross Part Number: 8622DR-004-02
- Release Date: March 26, 2015.

Copyright

© 2015 Ross Video Limited. Ross®, openGear®, and any related marks are trademarks or registered trademarks of Ross Video Ltd. All other trademarks are the property of their respective companies. PATENTS ISSUED and PENDING. All rights reserved. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, mechanical, photocopying, recording or otherwise, without the prior written permission of Ross Video. While every precaution has been taken in the preparation of this document, Ross Video assumes no responsibility for errors or omissions. Neither is any liability assumed for damages resulting from the use of the information contained herein.

Patents

Patent numbers US 7,034,886; US 7,508,455; US 7,602,446; US 7,802,802 B2; US 7,834,886; US 7,914,332; US 8,307,284; US 8,407,374 B2; US 8,499,019 B2; US 8,519,949 B2; US 8,743,292 B2; GB 2,419,119 B; GB 2,447,380 B; and other patents pending.

Important Regulatory and Safety Notices to Service Personnel

Before using this product and nay associated equipment, refer to the "**Important Safety Instructions**" listed below to avoid personnel injury and to prevent product damage.

Product may require specific equipment, and/or installation procedures to be carried out to satisfy certain regulatory compliance requirements. Notices have been included in this publication to call attention to these specific requirements.

Symbol Meanings

This symbol on the equipment refers you to important operating and maintenance (servicing) instructions within the Product Manual Documentation. Failure to heed this information may present a major risk of damage to persons or equipment.

Warning — *The symbol with the word "**Warning**" within the equipment manual indicates a potentially hazardous situation, which, if not avoided, could result in death or serious injury.*

Caution — *The symbol with the word "**Caution**" within the equipment manual indicates a potentially hazardous situation, which, if not avoided, may result in minor or moderate injury. It may also be used to alert against unsafe practices.*

Notice — *The symbol with the word "**Notice**" within the equipment manual indicates a potentially hazardous situation, which, if not avoided, may result in major or minor equipment damage or a situation which could place the equipment in a non-compliant operating state.*

ESD Susceptibility — *This symbol is used to alert the user that an electrical or electronic device or assembly is susceptible to damage from an ESD event.*

Important Safety Instructions

Caution — *This product is intended to be a component product of the DFR-8321 and OG3-FR series frame. Refer to the DFR-8300 and OG3-FR Series Frame User Manual for important safety instructions regarding the proper installation and safe operation of the frame as well as its component products.*

Warning — *Certain parts of this equipment namely the power supply area still present a safety hazard, with the power switch in the OFF position. To avoid electrical shock, disconnect all A/C power cords from the chassis' rear appliance connectors before servicing this area.*

Warning — *Service barriers within this product are intended to protect the operator and service personnel from hazardous voltages. For continued safety, replace all barriers after any servicing.*
This product contains safety critical parts, which if incorrectly replaced may present a risk of fire or electrical shock. Components contained with the product's power supplies and power supply area, are not intended to be customer serviced and should be returned to the factory for repair. To reduce the risk of fire, replacement fuses must be the same time and rating. Only use attachments/accessories specified by the manufacturer.

EMC Notices

United States of America
FCC Part 15

This equipment has been tested and found to comply with the limits for a class A Digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at their own expense.

Notice — *Changes or modifications to this equipment not expressly approved by Ross Video Limited could void the user's authority to operate this equipment.*

CANADA

This Class "A" digital apparatus complies with Canadian ICES-003.

Cet appariel numerique de la classe "A" est conforme a la norme NMB-003 du Canada.

EUROPE

This equipment is in compliance with the essential requirements and other relevant provisions of CE Directive 93/68/EEC.

INTERNATIONAL

This equipment has been tested to **CISPR 22:1997** along with amendments **A1:2000** and **A2:2002**, and found to comply with the limits for a Class A Digital device.

Notice — *This is a Class A product. In domestic environments, this product may cause radio interference, in which case the user may have to take adequate measures.*

Maintenance/User Serviceable Parts

Routine maintenance to this openGear product is not required. This product contains no user serviceable parts. If the module does not appear to be working properly, please contact Technical Support using the numbers listed under the "Contact Us" section on the last page of this manual. All openGear products are covered by a generous 5-year warranty and will be repaired without charge for materials or labor within this period. See the "Warranty and Repair Policy" section in this manual for details.

Environmental Information

The equipment that you purchased required the extraction and use of natural resources for its production. It may contain hazardous substances that could impact health and the environment.

To avoid the potential release of those substances into the environment and to diminish the need for the extraction of natural resources, Ross Video encourages you to use the appropriate take-back systems. These systems will reuse or recycle most of the materials from your end-of-life equipment in an environmentally friendly and health conscious manner.

The crossed out wheelie bin symbol invites you to use these systems.



If you need more information on the collection, re-use, and recycling systems, please contact your local or regional waste administration.

You can also contact Ross Video for more information on the environmental performance of our products.

Company Address

Ross Video Limited
8 John Street
Iroquois, Ontario, K0E 1K0
Canada

Ross Video Incorporated
P.O. Box 880
Ogdensburg, New York
USA 13669-0880

General Business Office: (+1) 613 • 652 • 4886
Fax: (+1) 613 • 652 • 4425
Technical Support: (+1) 613 • 652 • 4886
After Hours Emergency: (+1) 613 • 349 • 0006
E-mail (Technical Support): techsupport@rossvideo.com
E-mail (General Information): solutions@rossvideo.com
Website: http://www.rossvideo.com

Contents

Introduction 1

Overview 1-2
Features 1-3
SFS-8622-A Functional Block Diagrams 1-4
SFS-8622-B Functional Block Diagrams 1-5
SFS-8622-IC Functional Block Diagram 1-7
SFS-8622-OC Functional Block Diagram 1-8
SFS-8622-AIC Functional Block Diagrams 1-9
SFS-8622-AOC Functional Block Diagram 1-10
Frame Synchronizer Overview 1-11
User Interfaces 1-12
DashBoard Control System 1-12
Card-edge Monitoring 1-12
SNMP Monitoring and Control 1-12
Documentation Terms and Conventions 1-13

Installation 2

Before You Begin 2-2
Static Discharge 2-2
Unpacking 2-2
Installing a Card 2-3
Supported Rear Modules 2-3
Installing a Rear Module 2-3
Installing the Card 2-4
SFS-8622-A Cabling 2-5
SFS-8622-B Cabling 2-6
SFS-8622-IC and SFS-8622-OC Cabling 2-7
SFS-8622-IC Cabling 2-7
SFS-8622-OC Cabling 2-7
SFS-8622-AIC Cabling 2-8
SFS-8622-AOC Cabling 2-9
Using DashBoard 2-10
Software Upgrades 2-11

Video Setup 3

Before You Begin 3-2
Selecting a Reference Source 3-3
Frame Rate Compatibility 3-3
Selecting a Reference Source 3-3
Adding a Delay 3-5
Adjusting with Video Proc Amps 3-7
ANC Processing 3-8
HANC Processing 3-8
VANC Processing 3-8
Selecting a Test Pattern 3-9

Configuring the Moving Box Test Feature 3-10
Specifying the Output During a Loss of Input 3-11
Specifying a Custom Color 3-12

Audio Setup 4

Selecting an AES Configuration 4-2
Configuring the AES Inputs 4-4
Configuring the AES Outputs 4-5
Configuring the Analog Inputs 4-6
Configuring the Analog Outputs 4-7
Embedded Outputs 4-8
    Setting up Embedded Outputs 4-8
    Configuring the Embedded Output Groups 4-9
Embedding PCM and Non-PCM Signals 4-11
    Embedding PCM Signals 4-11
    Embedding Non-PCM Signals 4-11

Card-edge Monitoring 5

Card Overview 5-2
Control and Monitoring Features 5-3
    Status and Selection LEDs 5-3

DashBoard Menus 6

Status Tabs 6-2
    Signal Tab 6-2
    Hardware Tab 6-4
    Product Tab 6-5
Setup Tab 6-6
Proc Amp Tab 6-10
VANC Processing Tab 6-11
Input Status Tab 6-12
    Video Input & Embedded Tab 6-12
    Audio Tab 6-12
Embedded Outputs Tab 6-14
Analog Inputs Tab 6-15
Analog Outputs Tab 6-16
AES Inputs Tab 6-17
AES Outputs Tabs 6-18
Alarm Enables Tab 6-19

Specifications 7

Technical Specifications 7-2
    SDI Input 7-2
    SDI Outputs 7-2
    AES Inputs 7-3
    AES Outputs 7-3
    Analog Inputs 7-3
    Analog Outputs 7-4
    Environmental 7-4
    Total Power Consumption 7-4
Channel Status Data Table 7-5
    Passing the Status Bytes 7-5

Service Information 8

Troubleshooting Checklist 8-2
Bootload Button 8-2
Warranty and Repair Policy 8-3

Introduction

In This Chapter

This chapter contains the following sections:

- Overview
- SFS-8622-A Functional Block Diagrams
- SFS-8622-B Functional Block Diagrams
- SFS-8622-IC Functional Block Diagram
- SFS-8622-OC Functional Block Diagram
- SFS-8622-AIC Functional Block Diagrams
- SFS-8622-AOC Functional Block Diagram
- Frame Synchronizer Overview
- User Interfaces
- Documentation Terms and Conventions

A Word of Thanks

Congratulations on choosing an openGear SFS-8622 series Single Channel Frame Synchronizer with Audio Processing. Your card is part of a full line of products within the openGear family, backed by Ross Video's experience in engineering and design expertise since 1974.

You will be pleased at how easily your new card fits into your overall working environment. Equally pleasing is the product quality, reliability and functionality. Thank you for joining the group of worldwide satisfied Ross Video customers!

Should you have a question pertaining to the installation or operation of your card, please contact us at the numbers listed on the back cover of this manual. Our technical support staff is always available for consultation, training, or service.

Overview

Each card is a single channel 3G/HD/SD SDI frame synchronizer that automatically detects the incoming video format. Each card accepts an SDI signal of 270Mbps, 1.485Gbps, or 2.987Gbps, automatically equalizing for cable loss and providing two processed SDI outputs. The video is synchronized to either a frame-wide reference or a local reference. You can also resolve system timing problems as an additional fixed delay can be added to the video and/or audio.

Each card is also a high quality program audio multiplexer/de-multiplexer capable of embedding/de-embedding up to eight pairs (sixteen audio channels) into an SDI signal (see **Table 1.1**). Audio proc control on each output allows for audio processing with independent channel Sample Rate Conversion (SRC) on each AES input, gain of +/-20dB, audio delay up to 1 second and channel phase invert and summing capability. If the input is a synchronous 48kHz signal, the audio can be embedded into the SDI signal unaltered. If the input is not a synchronous 48kHz signal, it may be converted using SRC before it is embedded on the SDI output.

Table 1.1 summarizes how each card model can be configured in DashBoard.

Table 1.1 Card Models and Configuration Options

Card Model	Audio Mode 1	Audio Mode 2	Audio Mode 3
SFS-8622-A	6 x AES-3id 75ohm unbalanced inputs	6 x AES-3id 75ohm unbalanced outputs	3 x AES-3id 75ohm unbalanced inputs, 3 x AES-3id 75ohm unbalanced outputs
SFS-8622-B	8 x AES-3id balanced AES inputs	8 x AES-3id balanced AES outputs	4 x AES-3id balanced AES inputs, 4 x AES-3id balanced AES outputs
SFS-8622-IC	8 x analog inputs	--	--
SFS-8622-OC	8 x analog outputs	--	--
SFS-8622-AIC	4 x analog balanced inputs, 4 x AES-3id 75ohm unbalanced inputs	4 x analog balanced inputs, 4 x AES-3id 75ohm unbalanced outputs	--
SFS-8622-AOC	4 x AES-3id 75ohm unbalanced inputs, 4 x analog balanced outputs	4 x AES-3id 75ohm unbalanced outputs 4 x analog balanced outputs	--

Features

The following features are available:

- Supports SMPTE 259M (270Mbps), SMPTE 292M (1.485Gbps), and SMPTE 424M (2.987Gbps)
- Supports embedding of non-PCM data such as Dolby® Digital and Dolby® E
- Two SDI processed outputs
- Video proc amp on output video
- Configurable AES connections (see **Table 1.1** for mode options)
- Support for multiple frames of video delay
- Support for different reference format locking (frame rates must match)
- Programmable video output on SDI input loss
- Automatic input video format detection
- Ability to strip VANC data from specific or all lines of a video output
- Audio embedding for all popular formats: 480i, 576i, 720p, 1080i, and 1080p (Level A)
- Full control over channel assignments
- Audio proc controls such as gain, invert, delay and sum on embedded outputs and AES outputs
- Internally generated test patterns and test tones
- Programmable silence detection and timeout thresholds
- Automatic audio delay to match video delay in addition to up to 1 second of user adjusted audio delay
- Reports status and configuration remotely via the DashBoard Control System
- SNMP support available
- Fits openGear frames
- 5-year transferable warranty

SFS-8622-A Functional Block Diagrams

This section provides functional block diagrams that outline the work flow of the SFS-8622-A.

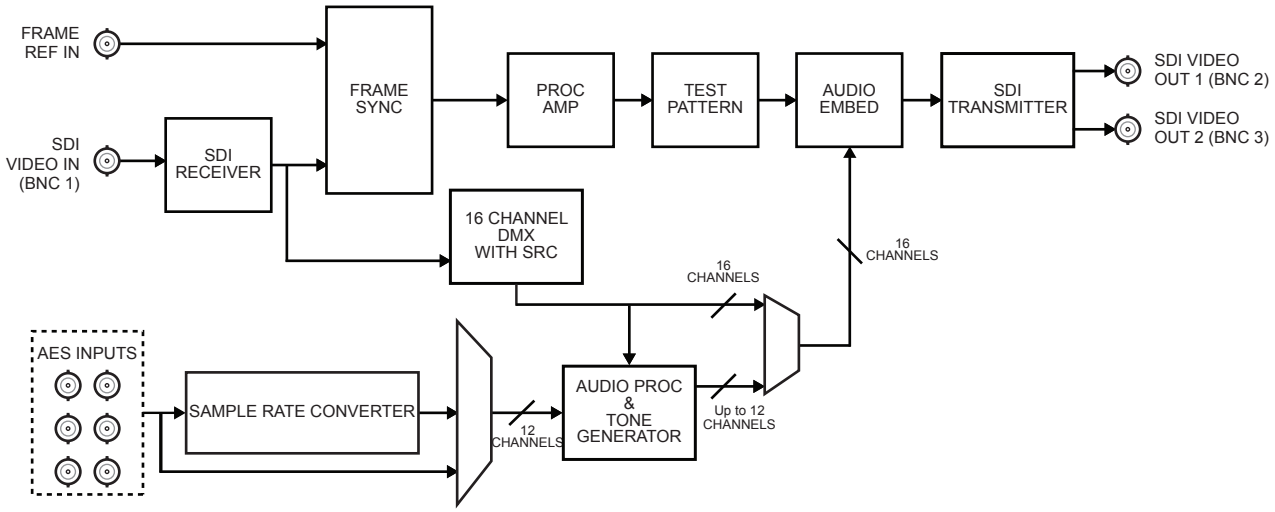

Figure 1.1 *SFS-8622-A — Six Unbalanced AES Inputs*

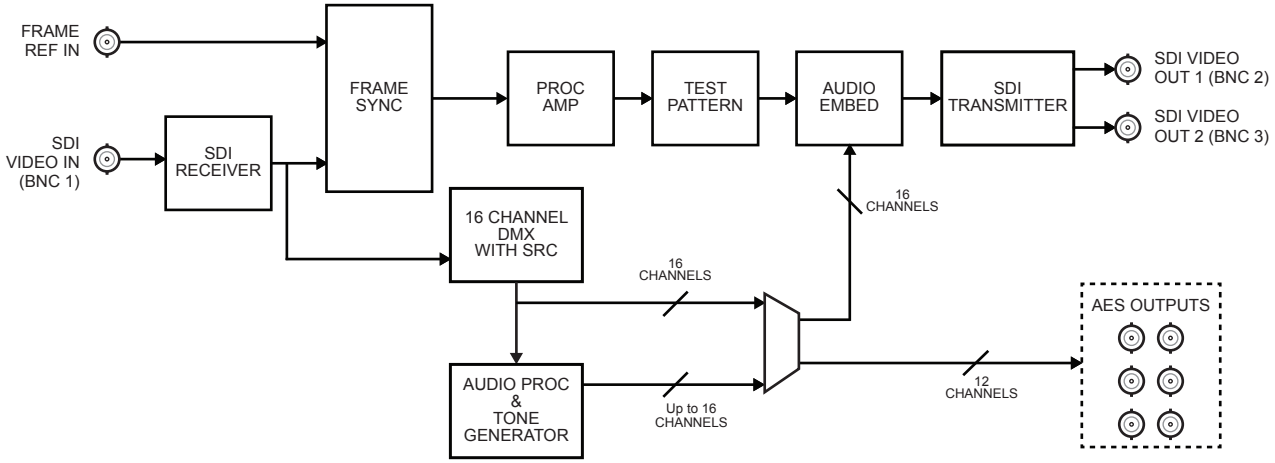

Figure 1.2 *SFS-8622-A — Six Unbalanced AES Outputs*

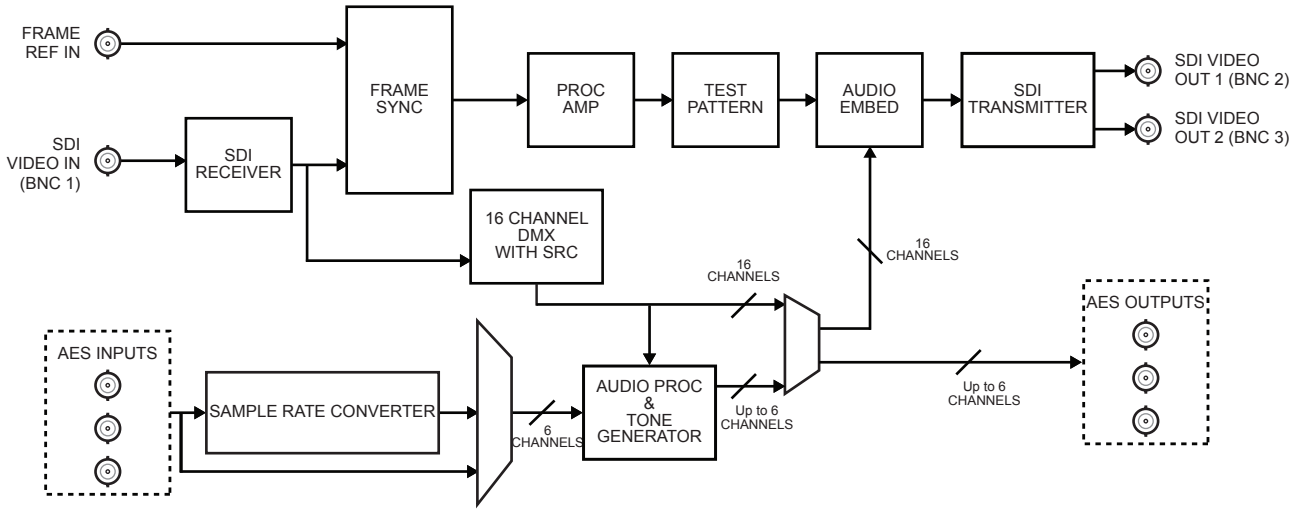

Figure 1.3 *SFS-8622-A — Three Unbalanced AES Inputs, Three Unbalanced AES Outputs*

SFS-8622-B Functional Block Diagrams

This section provides functional block diagrams that outline the work flow of the SFS-8622-B.

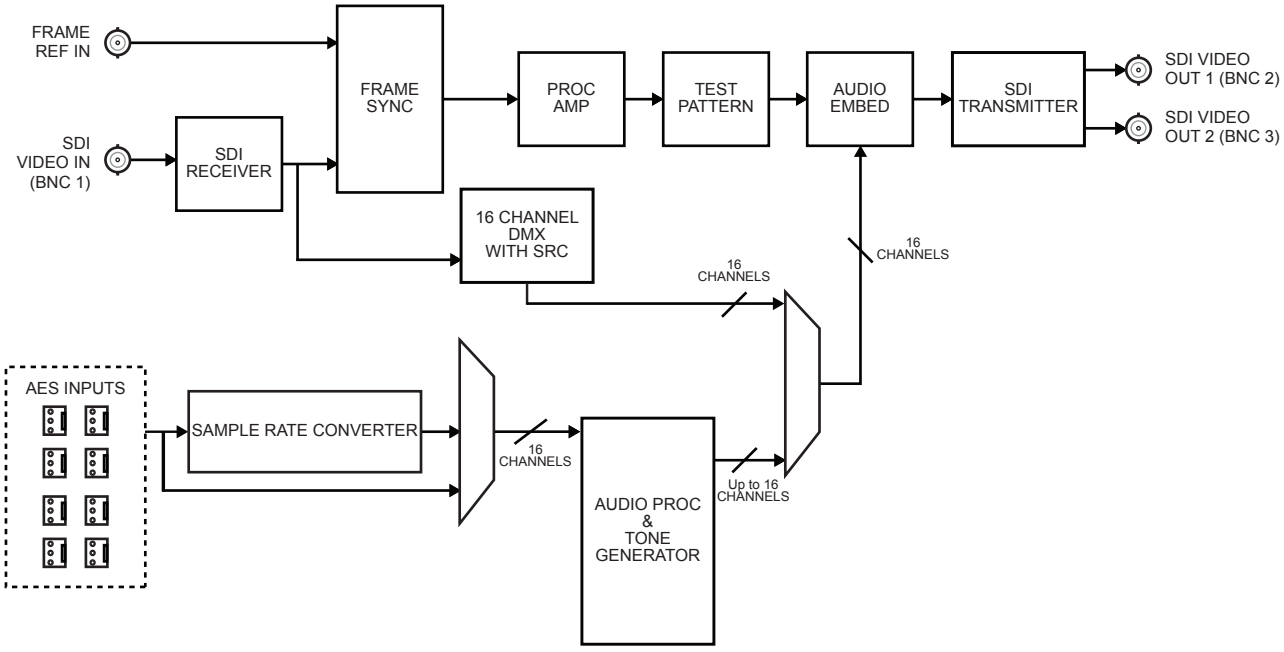

Figure 1.4 *SFS-8622-B — Eight Balanced AES Inputs*

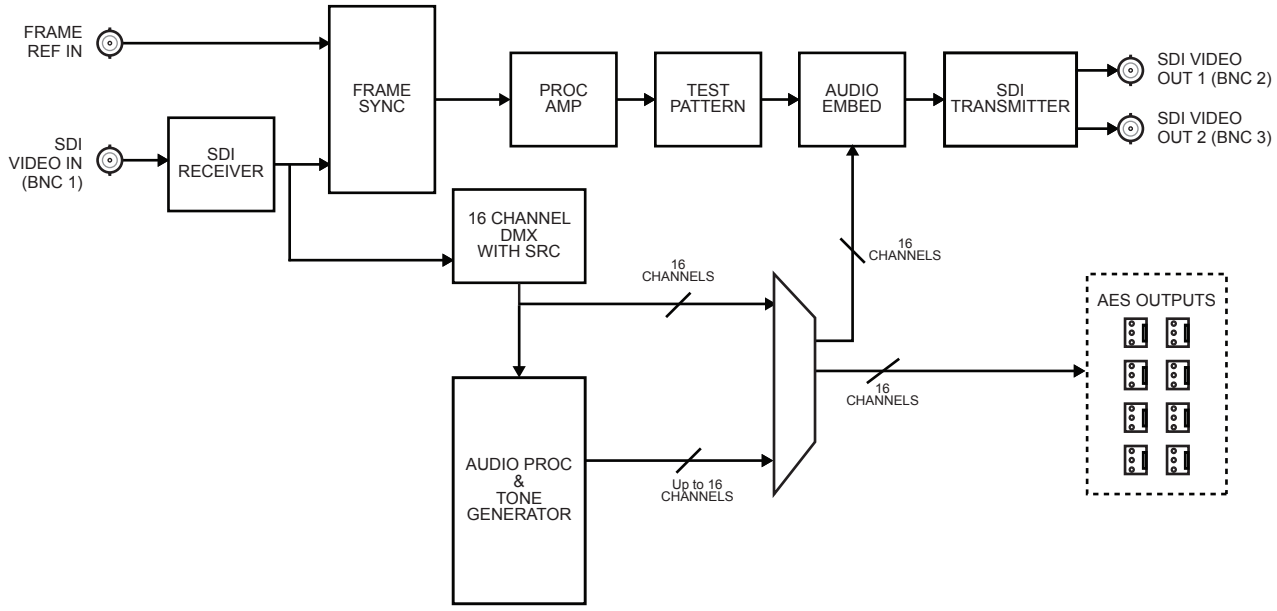

Figure 1.5 *SFS-8622-B — Eight Balanced AES Outputs*

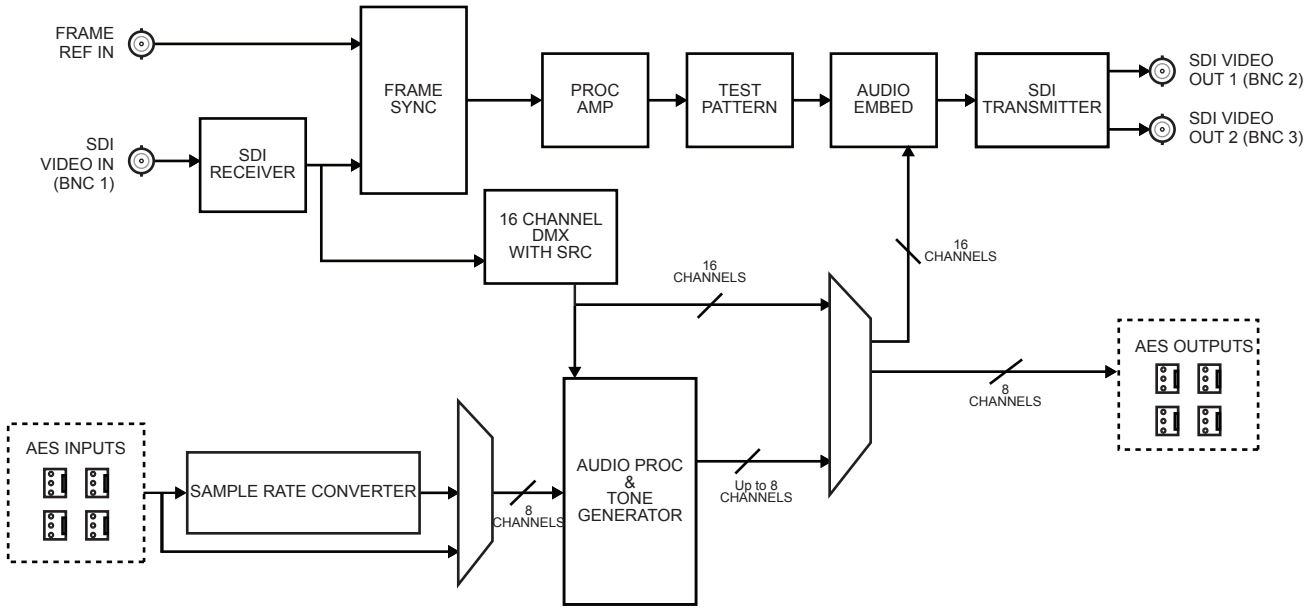

Figure 1.6 *SFS-8622-B — Four Balanced AES Inputs, Four Balanced AES Outputs*

SFS-8622-IC Functional Block Diagram

This section provides the functional block diagram that outlines the work flow of the SFS-8622-IC.

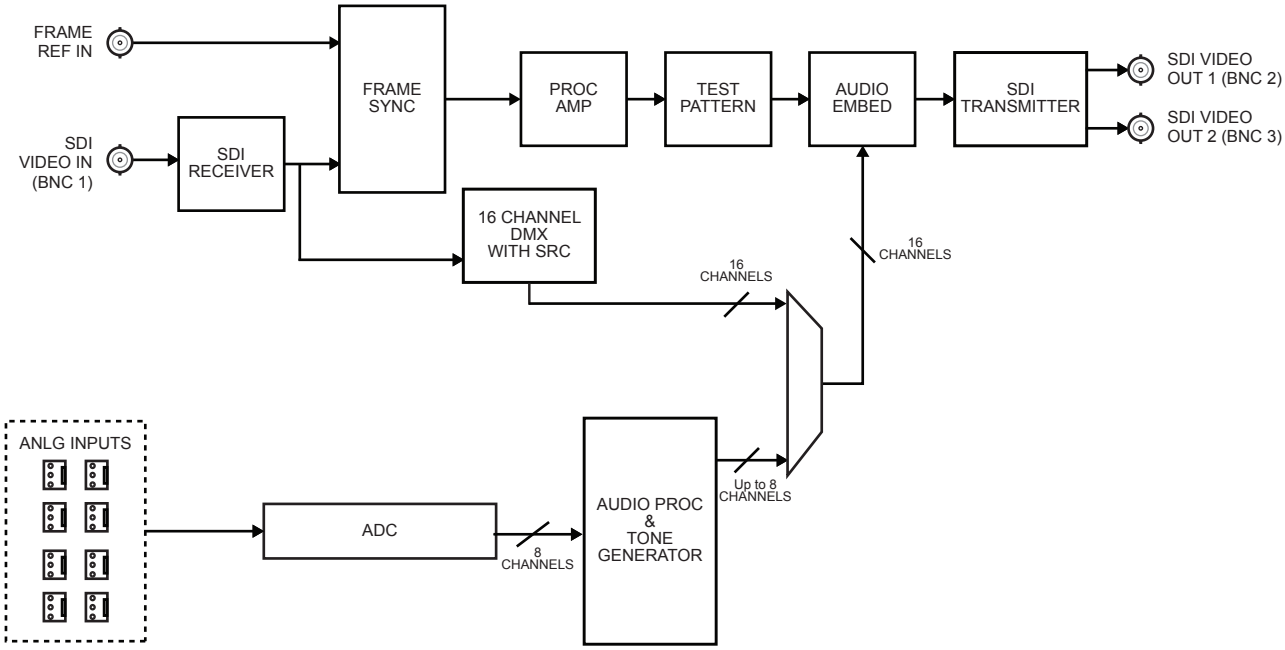

Figure 1.7 *SFS-8622-IC — Eight Analog Inputs*

SFS-8622-OC Functional Block Diagram

This section provides the functional block diagram that outlines the work flow of the SFS-8622-OC.

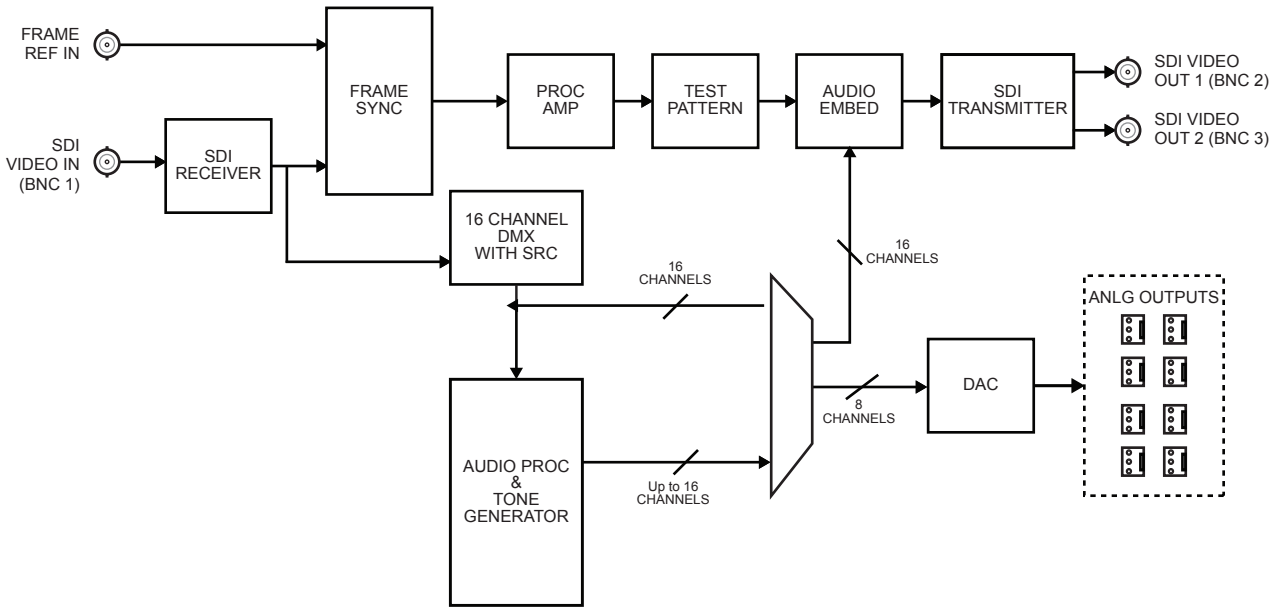

Figure 1.8 *SFS-8622-OC — Eight Analog Outputs*

SFS-8622-AIC Functional Block Diagrams

This section provides the functional block diagrams that outline the work flow of the SFS-8622-AIC.

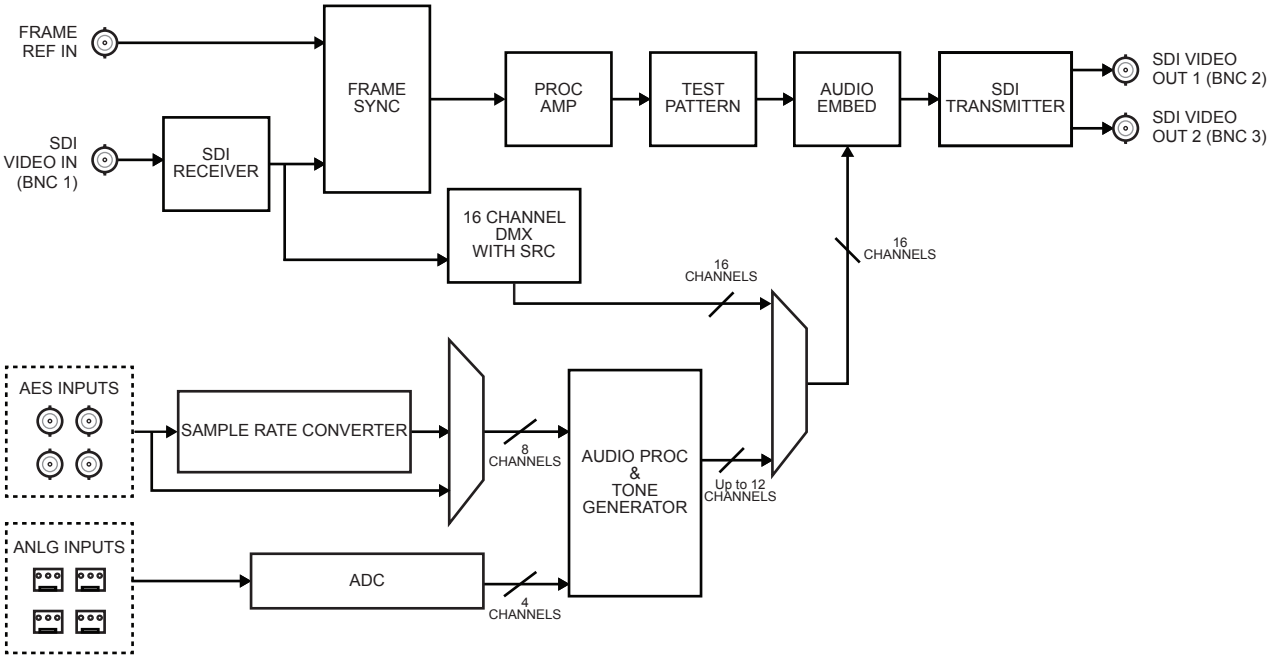

Figure 1.9 *SFS-8622-AIC — Four Unbalanced AES Inputs, Four Analog Balanced Inputs*

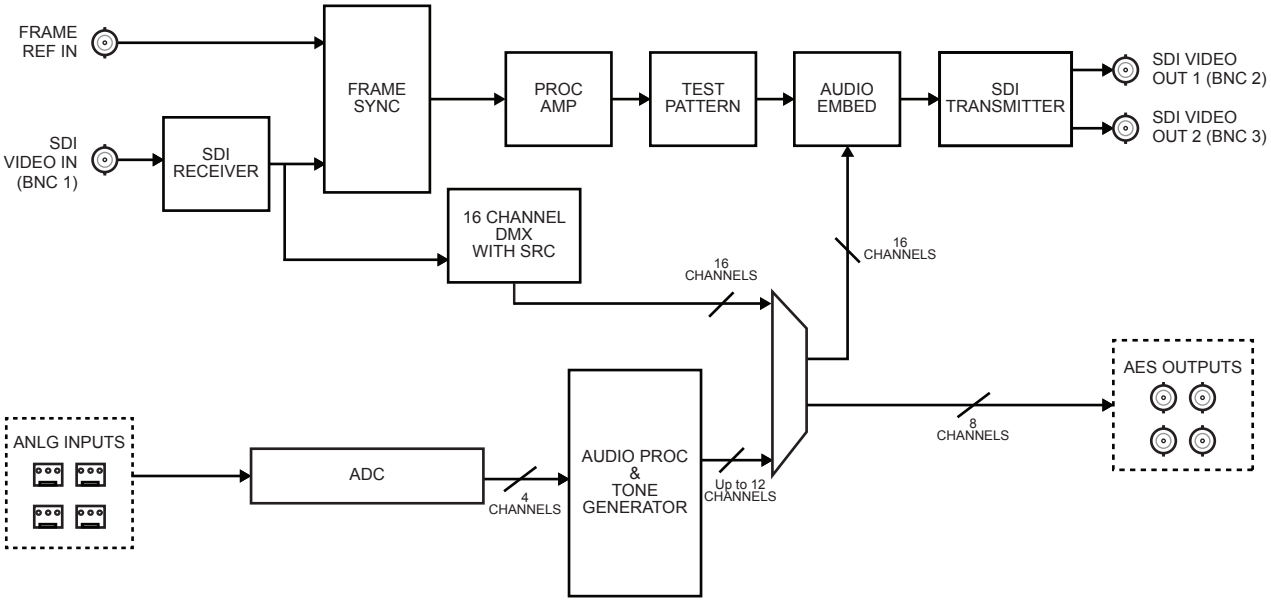

Figure 1.10 *SFS-8622-AIC — Four Analog Balanced Inputs, Four Unbalanced AES Outputs*

SFS-8622-AOC Functional Block Diagram

This section provides the functional block diagram that outlines the work flow of the SFS-8622-AOC.

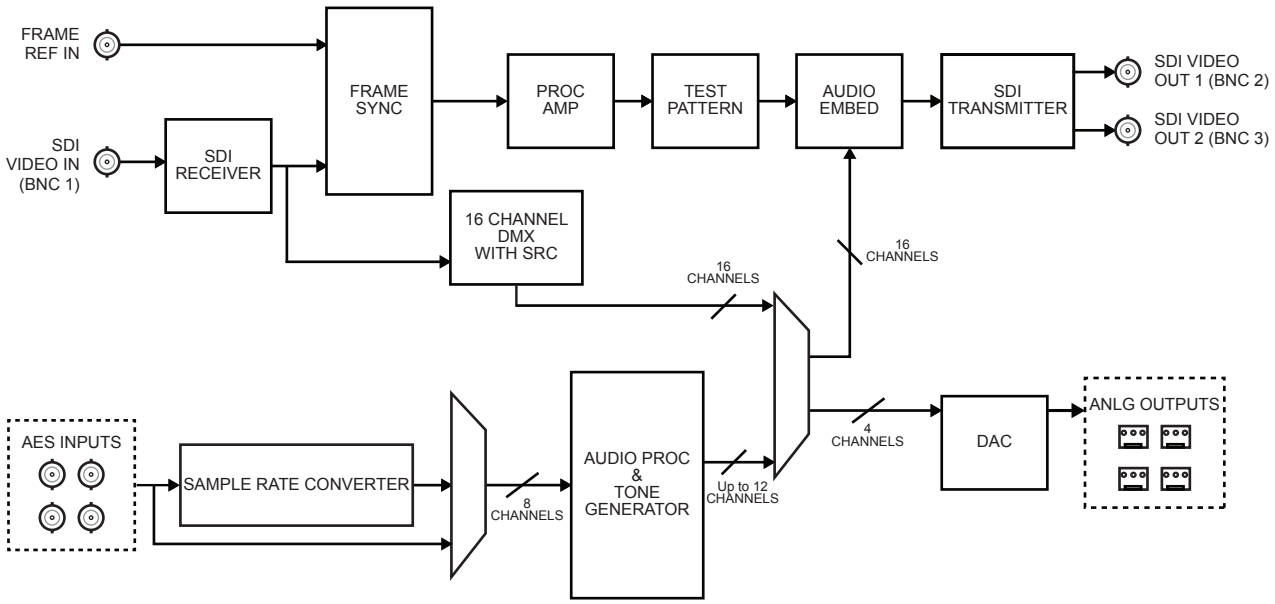

Figure 1.11 *SFS-8622-AOC — Four Unbalanced AES Inputs, Four Analog Outputs*

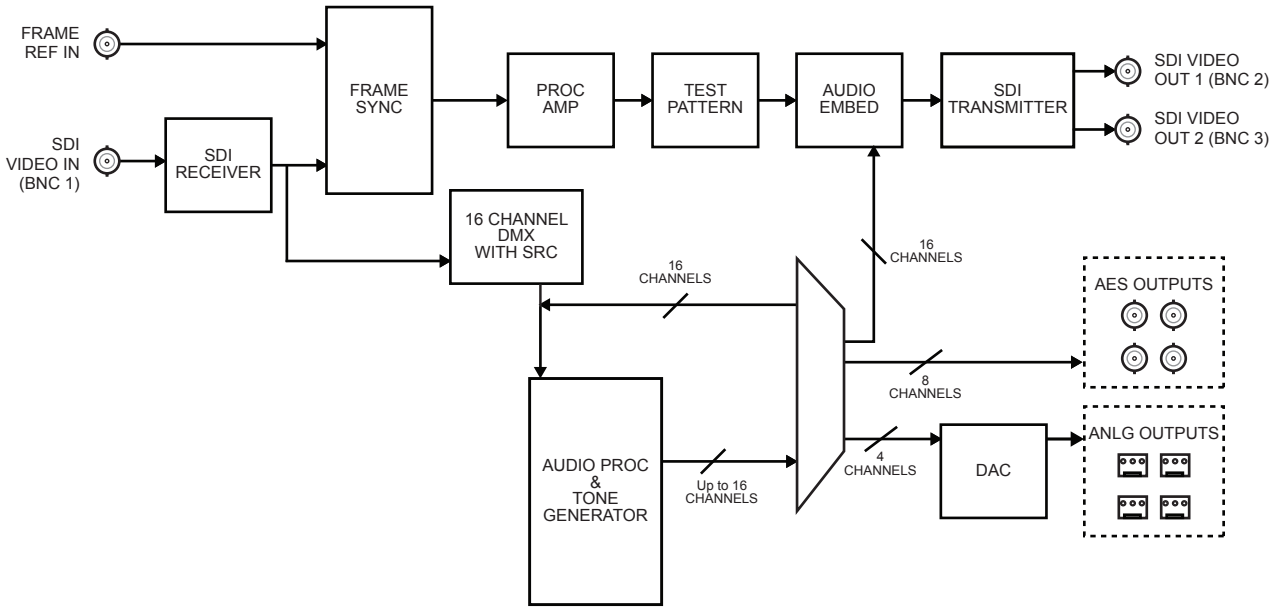

Figure 1.12 *SFS-8622-AOC — Four Unbalanced AES Outputs, Four Analog Outputs*

Frame Synchronizer Overview

Each card will typically be used in a broadcast studio for one or both of the following functions:

- Frame delay for timing alignment
- Frame synchronizer for frame rate conversion

Figure 1.13 illustrates the operation of your card.

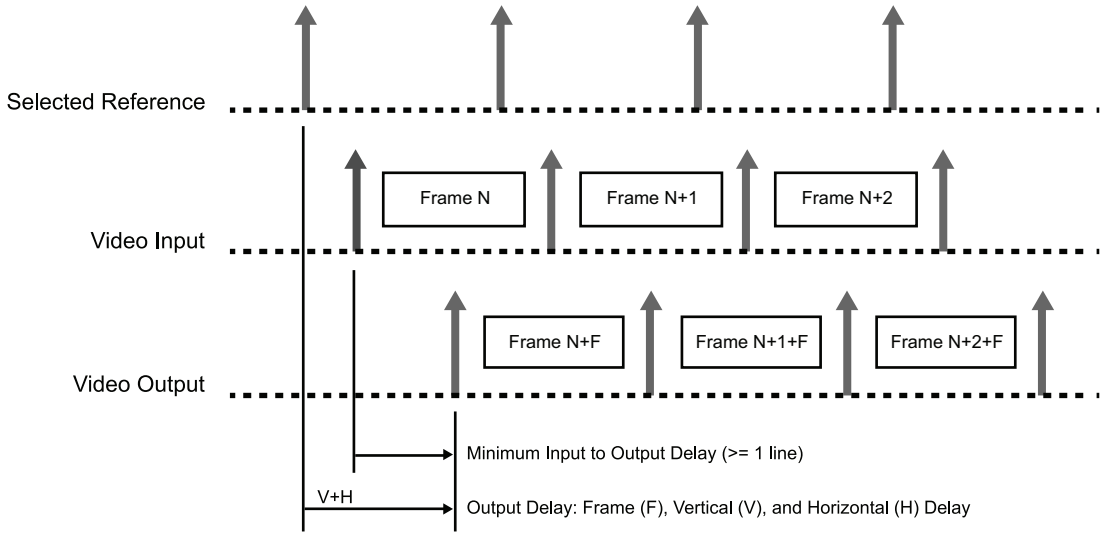

***Figure 1.13** Functional Overview*

The following elements are presented in **Figure 1.13**:

1. Up Arrow

Represents the start of a video frame.

2. Selected Reference

The selected reference can be on of the following: either analog reference from the openGear frame, or the digital reference extracted from the SDI video input. Note that when selecting the digital reference from the SDI input, **Figure 1.13** should be re-drawn with the Up Arrows of the Selected Reference and Video Input aligned vertically.

3. Video Input

The SDI video input is derived from the rear module. When the video input is not locked to the selected reference, the video input start of frame will drift compared to the reference. This can be visualized by sliding the Up Arrows of **Figure 1.13** to the left if the video input frame rate is slower than the reference, or to the right if it is higher.

4. Video Output

The processed SDI video outputs are available on the rear module.The video output timing is always locked to the selected reference. The card allows the user to set the relative position of the video output start of frame as an offset to the reference. With the adjustable Vertical and Horizontal Delay settings, you can set the relative offset anywhere in the reference frame timing, in increments of 1 line for vertical timing and 1 pixel for horizontal timing.

5. Delay (F, V, H)

The value F represents the number of frame of delay that can be adjusted, the value V the number of lines, and the value H the number of pixels of delay. The delay values can be adjusted from 0 to a maximum limited by video format. The default value is 1 frame. Refer to **Table 3.2** for details.

User Interfaces

Your card includes three control and monitoring interfaces.

DashBoard Control System

DashBoard enables you to monitor and control openGear frames and cards from a computer. DashBoard communicates with other cards in the frame through the Network Controller Card. The DashBoard Control System software and manual are available for download from our website.

For More Information on...

- the menus in DashBoard, refer to the chapter "**DashBoard Menus**" on page 6-1.
- using DashBoard, refer to the ***DashBoard User Manual***.

Card-edge Monitoring

The front-edge of each card features LED indicators for the power, and video reference input status.

For More Information on...

- the card-edge monitoring features, refer to the section "**Control and Monitoring Features**" on page 5-3.

SNMP Monitoring and Control

The Network Controller Card in the openGear frame can provide optional support for remote monitoring of your frame and using Simple Network Management Protocol (SNMP), which is compatible with many third-party monitoring and control tools.

For More Information on...

- enabling SNMP Monitoring and Control for your frame, refer to the ***MFC-8300 Series*** or ***MFC-OG3 Series User Manual***.
- SNMP controls for your card, refer to the Management Information Base (MIB) for your card model.

Documentation Terms and Conventions

The following terms and conventions are used throughout this manual.

Terms

The following terms are used:

- "**Board**", and "**Card**" refer to the SFS-8622-A, SFS-8622-B, SFS-8622-IC, SFS-8622-OC, SFS-8622-AIC, and SFS-8622-AOC unless otherwise noted.
- "**DFR-8321 series**" refers to DFR-8321 series frames and any available options.
- "**Frame**" refers to the openGear frame that houses the card.
- "**OG3-FR series**" refers to all versions of the OG3-FR series frames and any available options.
- "**openGear frame"** also includes all version of the DFR-8321 series and OG3-FR series frames and any available options unless otherwise noted.
- "**Operator**" and "**User**" refer to the person who uses the card.
- "**PAL**" refers to PAL-B, and PAL-G unless otherwise noted.
- "**PCM**" refers to Pulse Code Modulation.
- "**SRC**" refers to Sample Rate Conversion.
- "**System**" and "**Video system**" refer to the mix of interconnected production and terminal equipment in your environment.

Conventions

The following conventions are used:

- "**Operating Tips**" and "**Note**" boxes are used to provide additional user information.

Installation

In This Chapter

This chapter provides instructions for installing a rear module, installing a card into an openGear frame, cabling details, and updating the card software.

The following topics are discussed:

- Before You Begin
- Installing a Card
- SFS-8622-A Cabling
- SFS-8622-B Cabling
- SFS-8622-IC and SFS-8622-OC Cabling
- SFS-8622-AIC Cabling
- SFS-8622-AOC Cabling
- Using DashBoard
- Software Upgrades

Before You Begin

Before proceeding with the instructions in this chapter, ensure that your openGear frame is properly installed according to the instructions in its manual.

Static Discharge

Throughout this chapter, please heed the following cautionary note:

ESD Susceptibility — *Static discharge can cause serious damage to sensitive semiconductor devices. Avoid handling circuit boards in high static environments such as carpeted areas and when synthetic fiber clothing is worn. Always exercise proper grounding precautions when working on circuit boards and related equipment.*

Unpacking

Unpack each card you received from the shipping container and ensure that all items are included. If any items are missing or damaged, contact your sales representative or Ross Video directly.

Installing a Card

This section outlines how to install a rear module and card in an openGear frame.

Note — *The SFS-8622 series cards are not supported in the DFR-8310 series frames.*

Supported Rear Modules

Table 2.1 summarizes the required rear modules based on the card type. Each rear module occupies two slots in the openGear frame and accommodates one card.

Table 2.1 Supported Rear Modules

Model	Required Rear Module
SFS-8622-A	8320AR-041
SFS-8622-B	8320AR-062
SFS-8622-IC	8320AR-062
SFS-8622-OC	8320AR-062
SFS-8622-AIC	8320AR-058
SFS-8622-AOC	8320AR-058

Installing a Rear Module

If the rear module is already installed, proceed to the section "**Installing the Card**" on page 2-4.

To install a rear module in your openGear frame

1. Locate the card frame slots on the rear of the frame. Each rear module requires two slots.
2. Remove the Blank Plate from the slot you have chosen for the card installation.
3. Install the bottom of the rear module in the **Module Seating Slot** at the base of the frame's back plane. (**Figure 2.1**)

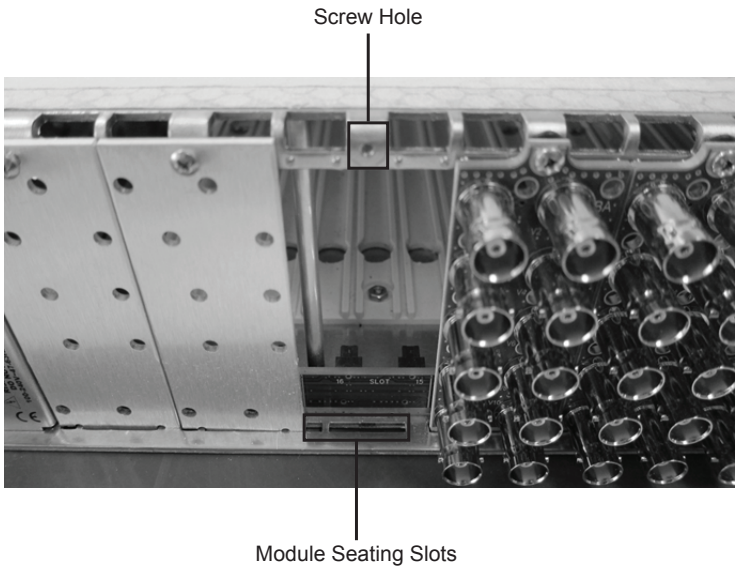

***Figure 2.1** Rear Module Installation in an openGear Frame (Card not shown)*

4. Align the top hole of the rear module with the screw on the top-edge of the frame back plane.
5. Using a Phillips screwdriver and the supplied screw, fasten the rear module to the back plane of the frame. Do not over tighten.
6. Ensure proper frame cooling and ventilation by having all rear frame slots covered with rear modules or blank plates.

Installing the Card

This section outlines how to install a card in an openGear frame. If the card is to be installed in any compatible frame other than a Ross Video product, refer to the frame manufacturer's manual for specific instructions. Note that each rear module occupies two slots but accommodates one card in the openGear frame.

To install the card in an openGear frame

1. Locate the Rear Module you installed in the procedure "**Installing a Rear Module**" on page 2-3.
2. Hold the card by the edges and carefully align the card-edges with the slots in the frame.
3. Fully insert the card into the frame until the rear connection plus is properly seated in the Rear Module.
4. Verify whether your Rear Module Label is self-adhesive by checking the back of the label for a thin wax sheet. You must remove the wax sheet before affixing the label.
5. Affix the supplied Rear Module Label to the BNC area of the Rear Module.

SFS-8622-A Cabling

This section illustrates the cabling designations for the SFS-8622-A. Note that the number of inputs and outputs is dependent on the selection made in the **AES I/O Config** menu in DashBoard.

Note — *AES inputs and outputs are configured in groups of three.*

Figure 2.2 illustrates the cabling designations for one SDI input, two SDI outputs, and six AES-3id 75ohm unbalanced inputs. The **AES I/O Config** is set to **6 in, 0 out**.

Figure 2.3 illustrates the cabling designations for one SDI input, two SDI outputs, and six AES-3id 75ohm unbalanced outputs. The **AES I/O Config** is set to **0 in, 6 out**.

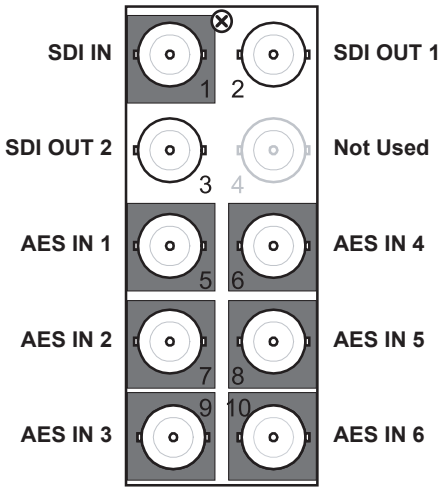

Figure 2.2 *Cable Connections for the SFS-8622-A*

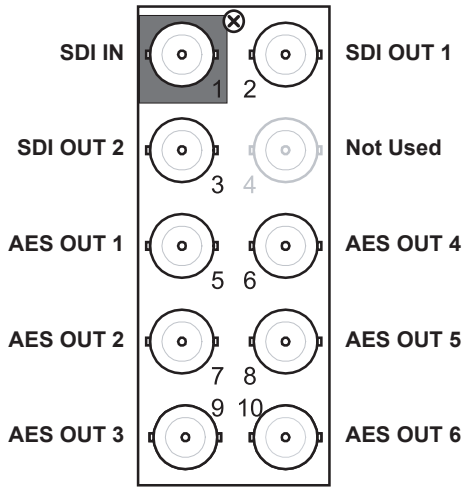

Figure 2.3 *Cable Connections for the SFS-8622-A*

Figure 2.4 illustrates the cabling designations for one SDI input, two SDI outputs, three AES-3id 75ohm unbalanced inputs, and three AES-3id 75ohm unbalanced outputs. The **AES I/O Config** is set to **3 in, 3 out**.

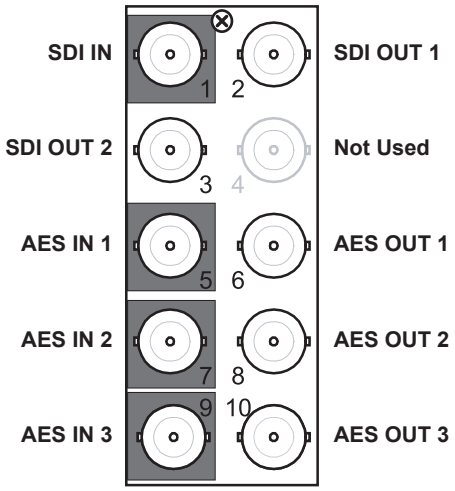

Figure 2.4 *Cable Connections for the SFS-8622-A*

SFS-8622-B Cabling

This section illustrates the cabling designations for the SFS-8622-B. Note that the number of inputs and outputs is dependent on the selection made in the **AES I/O Config** menu in DashBoard

Note — *AES inputs and outputs are configured in groups of four.*

Figure 2.5 illustrates the cabling designations for one SDI input, two SDI outputs, and eight AES-3id balanced AES inputs. The **AES I/O Config** is set to **8 in, 0 out**.

Figure 2.6 illustrates the cabling designations for one SDI input, two SDI outputs, and eight AES-3id balanced AES outputs. The **AES I/O Config** is set to **0 in, 8 out**.

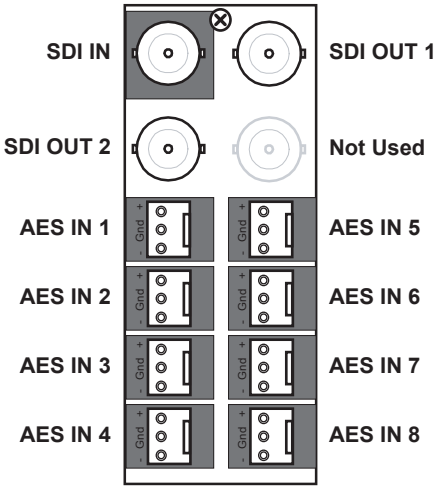

Figure 2.5 *Cable Connections for the SFS-8622-B — Eight AES Inputs*

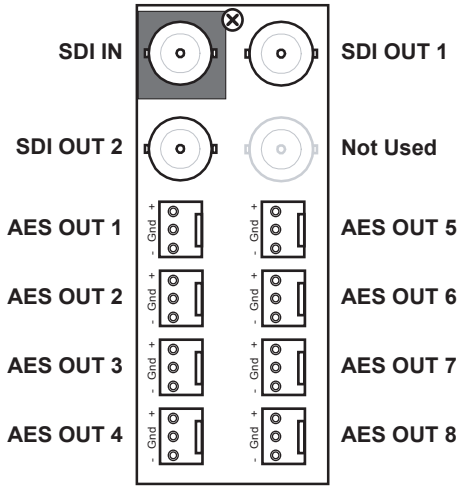

Figure 2.6 *Cable Connections for the SFS-8622-B — Eight AES Outputs*

Figure 2.7 illustrates the cabling designations for one SDI input, two SDI outputs, four AES-3id balanced AES inputs, and four AES-3id balanced AES outputs. The **AES I/O Config** is set to **4 in, 4 out**.

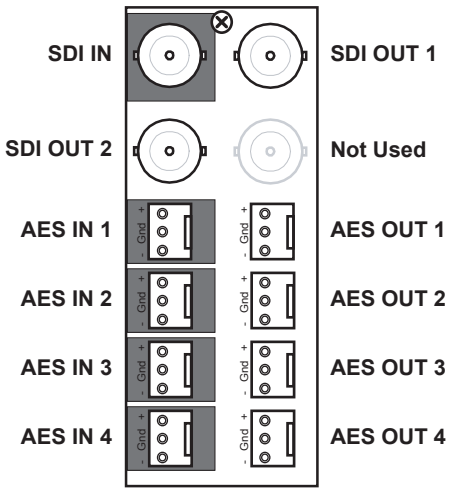

Figure 2.7 *Cable Connections for the SFS-8622-B — Four AES Inputs, Four AES Outputs*

SFS-8622-IC and SFS-8622-OC Cabling

This section outlines the cabling designations for the SFS-8622-IC and SFS-8622-OC.

SFS-8622-IC Cabling

Figure 2.8 illustrates the cabling designations for the SFS-8622-IC and the **8320AR-062** Full Rear Module. This rear module provides one SDI input, two SDI outputs, and eight analog inputs.

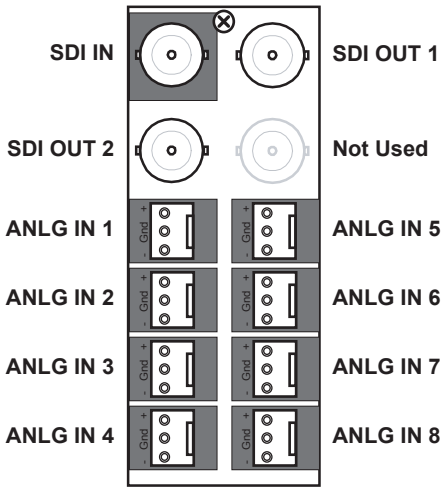

Figure 2.8 *Cable Connections for the SFS-8622-IC*

SFS-8622-OC Cabling

Figure 2.9 illustrates the cabling designations for the SFS-8622-OC and the **8320AR-062** Full Rear Module. This rear module provides one SDI input, two SDI outputs, and eight analog outputs.

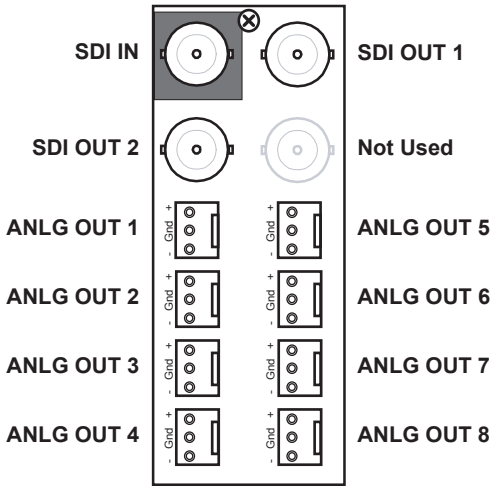

Figure 2.9 *Cable Connections for the SFS-8622-OC*

SFS-8622-AIC Cabling

This section illustrates the cabling designations for the SFS-8622-AIC. Note that the number of AES inputs and outputs is dependent on the selection made in the **AES I/O Config** menu in DashBoard

Note — *AES inputs and outputs are configured in groups of four.*

Figure 2.10 illustrates the cabling designations for one SDI input, two SDI outputs, four AES-3id unbalanced inputs, and four analog balanced inputs. The **AES I/O Config** is set to **4 in, 0 out**.

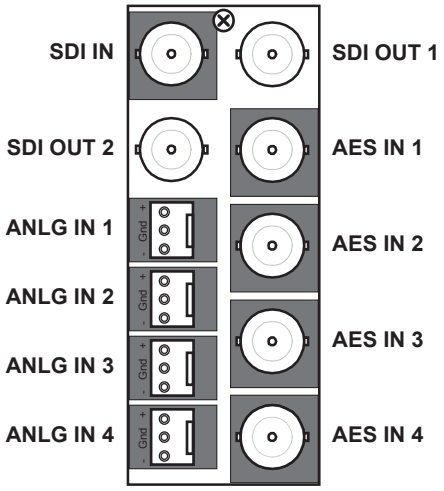

Figure 2.10 *Cable Connections for the SFS-8622-AIC — Four Analog Inputs, Four AES Inputs*

Figure 2.11 illustrates the cabling designations for one SDI input, two SDI outputs, four analog balanced inputs, and four AES-3id unbalanced outputs. The **AES I/O Config** is set to **0 in, 4 out**.

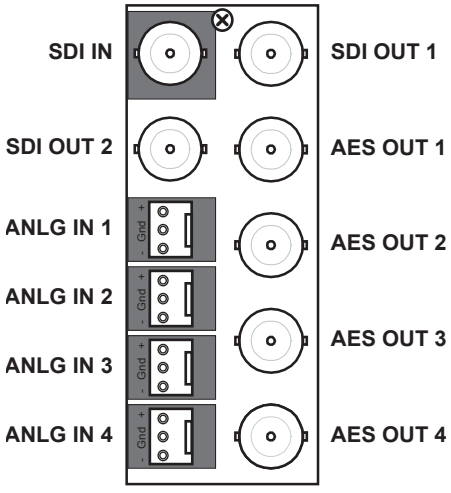

Figure 2.11 *Cable Connections for the SFS-8622-AIC — Four Analog Inputs, Four AES Outputs*

SFS-8622-AOC Cabling

This section illustrates the cabling designations for the SFS-8622-AOC. Note that the number of AES inputs and outputs is dependent on the selection made in the **AES I/O Config** menu in DashBoard

Note — *AES inputs and outputs are configured in groups of four.*

Figure 2.12 illustrates the cabling designations for one SDI input, two SDI outputs, four AES-3id 75ohm unbalanced inputs, and four analog balanced outputs. The **AES I/O Config** is set to **4 in, 0 out**.

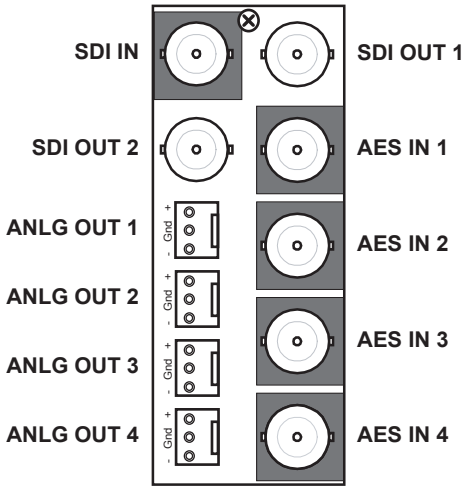

Figure 2.12 *Cable Connections for the SFS-8622-AOC — Four AES Inputs, Four Analog Outputs*

Figure 2.13 illustrates the cabling designations for one SDI input, two SDI outputs, four AES-3id 75ohm unbalanced outputs, and four analog balanced outputs. The **AES I/O Config** is set to **0 in, 4 out**.

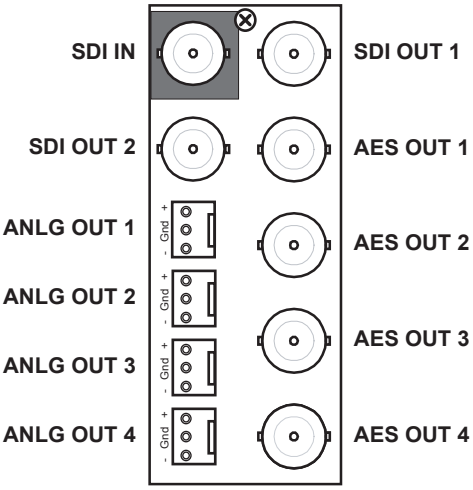

Figure 2.13 *Cable Connections for the SFS-8622-AOC — Four Analog Outputs, Four AES Outputs*

Using DashBoard

Before proceeding, ensure that the DashBoard is installed on a computer connected to your facility network. The DashBoard software and user manual are available from the Ross Video website.

For More Information on...

- using DashBoard, refer to the ***DashBoard User Manual***.

To launch DashBoard

1. Ensure that you are running DashBoard software version 6.2.0 or higher.
2. Launch DashBoard by double-clicking its icon on your desktop.
3. Ensure that the openGear frame with your card is displayed in the Tree View located on the left-side of the DashBoard window. It may take 30 seconds or more to update the Tree View. Consult the ***MFC-8300 Series*** or ***MFC-OG3 Series User Manual*** and ***DashBoard User Manual*** should the Tree View not display your card.

To access a card in DashBoard

1. From the **Tree View**, expand the node for the openGear frame your cards are installed in. A list of cards installed in the frame is now displayed. In the example below, the node for Frame 5 is expanded to show a list of six cards including an SFS-8622-A.
2. Double-click the node for a card to display its menus in the **Device View** of DashBoard (right-side of the DashBoard window).

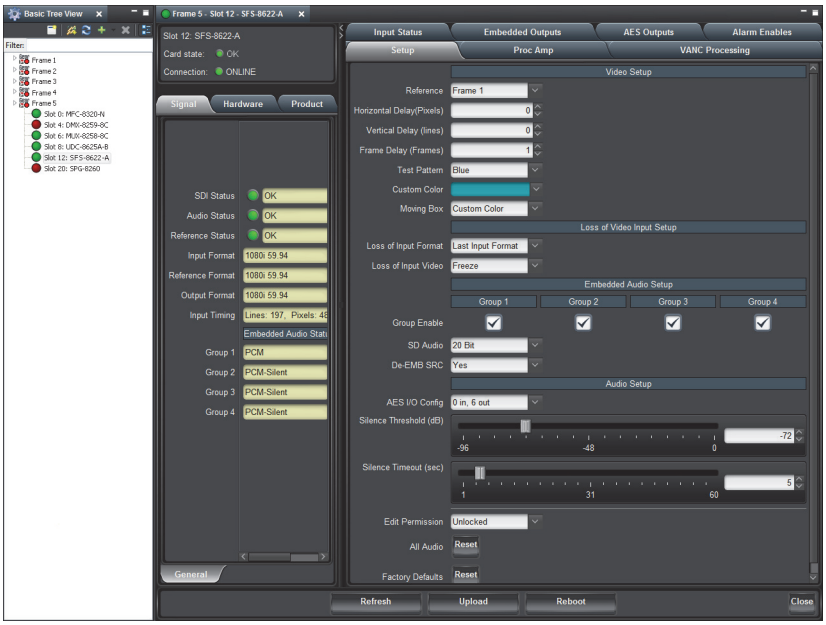

Example of an SFS-8622-A in DashBoard

Software Upgrades

This section provides instructions for upgrading the software for your card using the DashBoard Control System.

To upload software to the card

1. Contact Ross Technical Support for the latest software version file.
2. In DashBoard, double-click the card status indicator in the **Basic Tree View**.
3. From the **Device** tab, click **Upload** to display the **Select File for upload** dialog box.
4. Navigate to the *.bin upload file you wish to upload. DashBoard automatically selects the last directory that you loaded from.
5. Click **Open** to display a confirmation dialog box. This dialog box displays the selected upload file name, type, size, and the file creation date.
6. From the **Confirmation** dialog box, select one of the following:
   - **Cancel** — Select this option to cancel the upload of the file and return to the **Device View**.
   - **Continue** — Select this option to upload the file. While uploading, an **Uploading Progress** dialog box opens.

Notice — *Clicking the **Cancel** button while uploading will leave the card in an invalid state. Do not click **Cancel** unless the uploading progress has stopped completely for 60 seconds or more. If upload fails, repeat the upload process from DashBoard. If the upload process fails again, refer to the section "**Bootload Button**" on page 8-2.*

7. Monitor the upgrade progress bar displayed in DashBoard while the software is upgraded on your card.
8. To complete the upgrade process, you must reboot the card as follows:
   - From the **Device** tab, click **Reboot** to reboot card. The reboot process takes up to 30 seconds.

Note — *The communications processor of the card requires approximately 30 seconds to re-start and re-establish network communications.*

   - The card automatically saves all your settings before starting the reboot process.
   - The status of all the cards in the frame are grayed out until the reboot process is complete.

Video Setup

In This Chapter

This chapter provides a general overview of the user controls available on your card.

The following topics are discussed:

- Before You Begin
- Selecting a Reference Source
- Adding a Delay
- Adjusting with Video Proc Amps
- ANC Processing
- Selecting a Test Pattern
- Configuring the Moving Box Test Feature
- Specifying the Output During a Loss of Input
- Specifying a Custom Color

Before You Begin

Each card provides a valid video output frame with formatted TRS codes. In certain conditions, however, the video output of the card will have to be re-synchronized and while doing so, the card will not be able to maintain a valid output. The following conditions will force a re-sync of the video output of the card:

- **Reference loss and reference re-acquired** — To provide a stable output, the card must have a stable reference.
- **Changes in the vertical (V) or horizontal (H) delay parameters** — A parameter change will force the SFS output to reset and restart the video output with the specified V/H offset. Note that changing the number of frames (F) of delay will not reset the output as long as the V/H parameters are constant.
- **Video input format change** — Depending on how the **Loss of Input Format** setting[1] is configured, the card will auto-detect the video input format and apply the last valid input format (Last Input Format setting) or a specified format, it will set its output to match it. While doing so, the output will be reset to the format and re-started.

It is important to understand that when the card is using the digital reference extracted from the SDI video input, the SDI video input signal must be stable at all times. Any glitches on this signal will likely cause the card video output to stop and restart, basically re-syncing the video output to the digital reference. Therefore, in practical applications, it will not be possible to switch the SDI video input from an upstream router without re-syncing the card video output. For this reason, it is strongly recommended not to use the SDI input as the reference, and to select instead one of the analog references. If the SDI video input signal happens to be locked to the selected analog reference, the card will be effectively operating in frame delay mode, as no frames drop/repeat will be occurring.

Audio Timing

The audio timing for embedded audio of the SFS-8622 series card will be within 1 frame of the video timing on the output (approximately 16ms in SD formats), as measured with an asynchronous video input and with no additional audio delay being added through card user controls. If the input video is locked to the same reference as the card, and is not asynchronous, the audio delay will match the video delay.

1. The Loss of Input Format setting can be configured to either a user-specified video format or to auto-detect the format of an incoming video signal and will set the card output to match. While doing so, the output will be reset and re-locked to the selected reference signal (if available) or an internal clock.

Selecting a Reference Source

The openGear frames support a distributed frame reference, allowing incoming reference signals to feed timing information to all cards in that frame. Thus, a single signal can be used for multiple cards.

Frame Rate Compatibility

Refer to **Table 3.1** for frame rate compatibility. Note that 720p, 1080i 60Hz, 1080p 30Hz, and 1080p 60Hz are supported with 60Hz frame rate references.

Table 3.1 Output/Reference Compatibility

Video Format	Reference Format									
	480i 59.94 (NTSC)	1080i 59.94Hz	720p 59.94Hz	576i 50Hz (PAL)	1080i 50Hz	720p 50Hz	1080p 23.98Hz	1080psf 23.98Hz	1080p 24Hz	1080psf 24Hz
480i 59.94	✓	✓	✓							
720p 59.94Hz	✓	✓	✓							
1080i 59.94Hz	✓	✓	✓							
1080p 59.94Hz	✓	✓	✓							
1080p 29.97Hz	✓	✓	✓							
576i 50Hz				✓	✓	✓				
720p 50Hz				✓	✓	✓				
1080i 50Hz				✓	✓	✓				
1080p 50Hz				✓	✓	✓				
1080p 25Hz				✓	✓	✓				
1080psf 24Hz									✓	✓
1080psf 23.98Hz							✓	✓		
1080p 23.98Hz							✓	✓		

Note — *When using a progressive format reference signal to lock an interlaced format video signal, the lock will be Frame Locked but Field indeterminate.*

Selecting a Reference Source

If the **Reference source** is set to **Frame 1**, or **Frame 2**, if the reference present is valid, and if the frame timing settings is greater than or equal to 1, the card is automatically set to Frame Sync mode. If a valid reference is selected, and then removed, the card will remain in Frame Sync mode but will flywheel. This means that the card will be dropping or repeating the display of some video input frames as necessary to keep the input to output delay within the specified range of F to F+1 frames delay. The frame drop/repeat occurs whenever the video input frame start point crosses over the video output frame start point.

The card has built-in hysteresis to avoid visible artifacts if the input and output timing alignment oscillates around the drop/repeat cross-over point.

To select a reference source for the card

1. From the **Device View** in DashBoard, select the **Setup** tab.

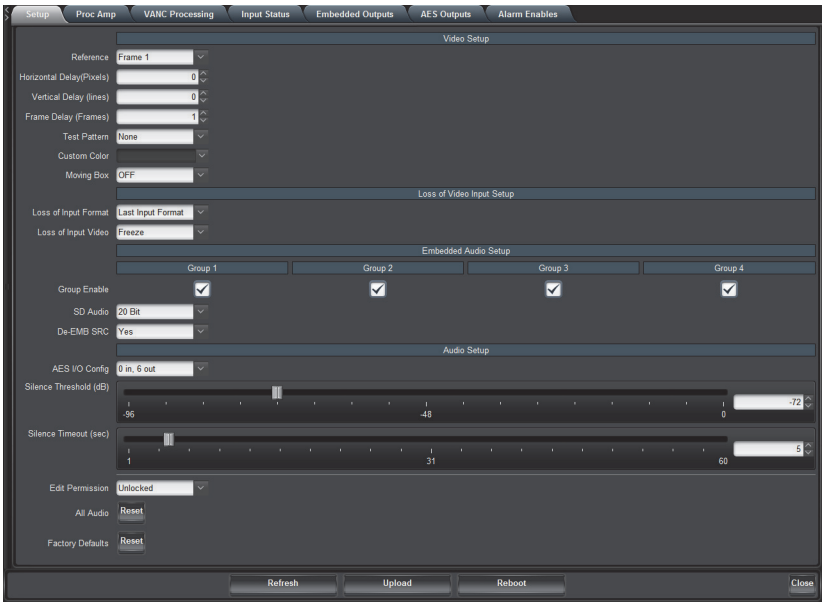

Setup Tab — SFS-8622-A

2. Select a reference input from the **Reference Setup** area. Refer to **Table 6.4** on page 6-6 for a list of options. If you are using **Frame 1** or **Frame 2** as the reference, the card input video frame rate must match the reference frame rate.

Adding a Delay

The card is suited to solve system timing problems where the difference in delay is constant between two paths. An example of this would be a situation where a downstream switcher needs to have clean switches between the output of a production switcher and some of the same input sources fed to the production switcher. The card cannot completely correct badly missed switches, signal drops, or similar issues unless the user has chosen to add at least 1 frame of delay. Note that the **Input Timing** field of the **Signal** tab reports the input video timing with respect to the selected analog reference signal.

The delay values can be adjusted from 0 to a maximum limit that depends on the video format. Refer to **Table 3.2** for the range of available delay values.

Table 3.2 Delay Range

Format	Range of Values		
	Horizontal Delay (pixels)	Vertical Delay (lines)	Frame Delay (frames)
480i 59.94	0-857	0-524	0-120
576i 50	0-863	0-624	0-100
1080p 60	0-2199	0-1124	0-36
1080p 59.94	0-2199	0-1124	0-36
1080p 50	0-2639	0-1124	0-30
1080i 60	0-2199	0-1124	0-36
1080i 59.94	0-2199	0-1124	0-36
1080i 50	0-2639	0-1124	0-30
1080p 30	0-2199	0-1124	0-36
1080p 29.97	0-2199	0-1124	0-36
1080p 25	0-2639	0-1124	0-30
1080p 24	0-2749	0-1124	0-28
1080p 23.98	0-2749	0-1124	0-28
1080pSF 24	0-2749	0-1124	0-28
1080pSF 23.98	0-2749	0-1124	0-28
720p 60	0-1649	0-749	0-75
720p 59.94	0-1649	0-749	0-75
720p 50	0-1979	0-749	0-62

To add a delay to the video output

1. From the **Device View** in DashBoard, select the **Setup** tab.

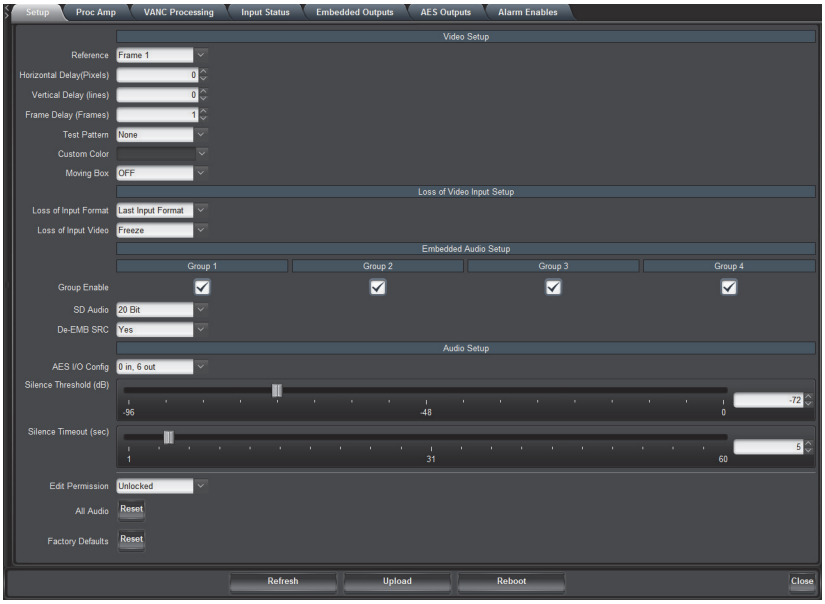

Setup Tab — SFS-8622-A

2. Use the **Horizontal Delay** field to specify the horizontal delay, relative to the selected reference. Adjustments are made in pixel increments.
3. Use the **Vertical Delay** field to specify the vertical delay, relative to the selected reference. Adjustments are made in line increments.
4. Use the **Frame Delay** field to specify the delay in number of frames. Frame delay adjustments are made in full frame increments.

Adjusting with Video Proc Amps

The output on the card has a Proc Amp that can adjust the black offset, the video gain, the C_r gain, and the C_b gain. This section briefly outlines how to adjust the options available in the **Proc Amp** tab.

For More Information on...

- the options in the Proc Amp tab, refer to **Table 6.5** on page 6-10.

To adjust the output using a Proc Amp

1. From the **Device View,** select the **Proc Amp** tab.

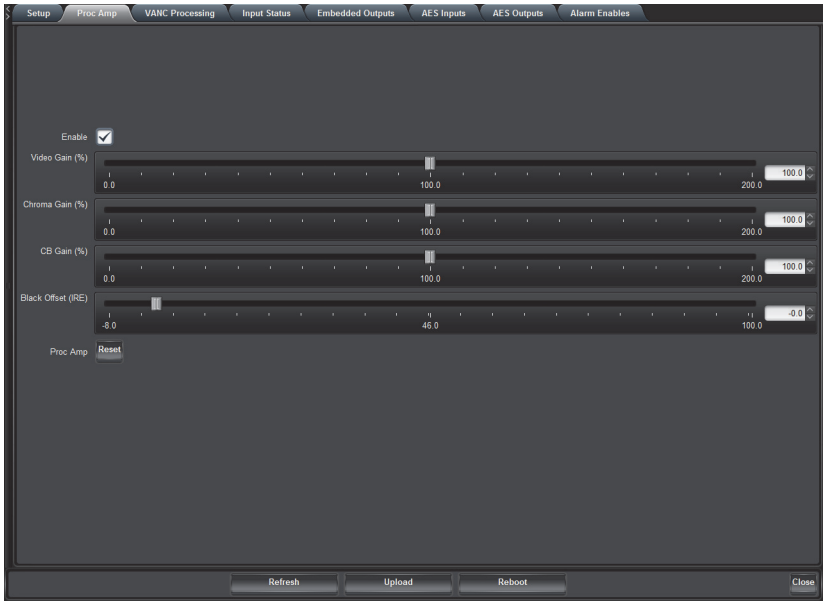

Proc Amp Tab — SFS-8622-A

2. Select the **Enable** box to ensure your adjustments are applied. The **Enable** box must be selected in order for Proc Amp adjustments to take effect on the output. Note that the Proc Amp controls are not applied when the outputs are assigned to Test Pattern.
3. Use the **Video Gain** slider to adjust the video gain. This gain control affects the luminance (Y) and the color difference signals (Cr and Cb).
4. Use the **Chroma Gain** slider to adjust the chrominance video signal components (Cr and Cb) simultaneously.
5. Use the **CB Gain** slider to adjust the Cb component of the chrominance video signal.
6. Use the **Black Offset** slider to adjust the Black Offset you want to apply.

Operating Tip — *To reset the Proc Amps settings to the default values, click **Reset** and then **Yes** in the **Confirm** dialog.*

ANC Processing

Ancillary Data (ANC) is the non-video data that can be embedded within the SDI signal, such as audio, audio metadata, timecode, closed caption data, AFD, and payload identification. This section briefly summarizes the ANC processing features of the card.

HANC Processing

SMPTE 291M formatted ancillary packets, such as SMPTE 12M-2 (timecode), that are found in the Luma portion (Y stream) of the HANC in the video signal (other than audio related packets) will be passed from input to output.

VANC Processing

The card provides options for replacing the full active portion of selected lines of video with black. The **VANC Processing** tab is divided into separate sub-tabs for each format to provide selection of the lines. This enables you to individually select any combination of lines, from line 1 up to the third line after the active video for the current video format. For interlaced formats, the lines in the two fields are separately configured. **Table 3.3** lists the allowable line selections based on format.

Table 3.3 VANC Processing — Line Selection

Format	Field 1 Lines	Fields 2 Lines
1080p	1-44	-
1080i	1-23	562-586
720p	1-28	-
576i	1-25	313-338
480i	1-23	264-285

To delete the VANC components in a line

1. Display the **Device View** in DashBoard for the card you wish to configure.
2. Select the **VANC Processing** tab.
3. Select the sub-tab, located at the bottom of the **VANC Processing** tab, for the applicable video format. When using an 1080pSF input signal, select the 1080i sub-tab.
4. In the **Line** column, locate the line you wish to delete the VANC components for. Notice for interlaced formats that the **Line** column on the left lists the lines in **Field 1**, and the **Line** column on the right lists the lines in **Field 2**.
5. To delete the VANC components:
   - **for a specific line** — select **Strip** for that line. The default for each line is **Pass**.
   - **for all lines of a video format** — click the **Strip** button located near the bottom of the applicable sub-tab.

Operating Tip — *To pass the VANC components without modification for all lines in a specific video format, click the **Pass** button located near the bottom of the sub-tab.*

Selecting a Test Pattern

You can also specify the type of internally generated test pattern to output.

Note — *When selecting a test pattern as the Loss of Input Video, the card will output the video in whatever format is selected in the Loss of Input Format field.*

To select the type of test pattern to output

1. From the **Device View** in DashBoard, select the **Setup** tab.

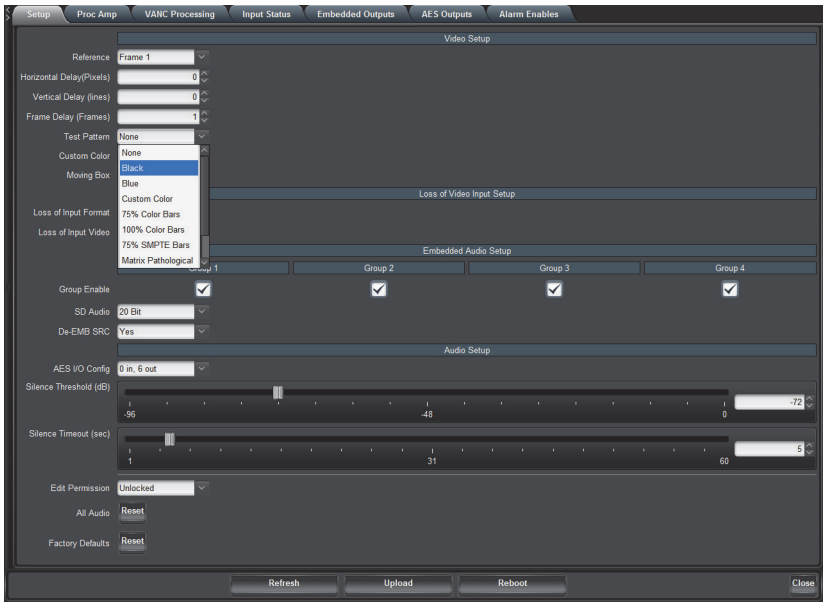

Setup Tab — Test Pattern Menu

2. Use the **Test Pattern** menu to select a pattern to display on the output. Refer to **Table 6.4** on page 6-6 for a list of options.

3. If you selected **Custom Color** in step 2, specify the color as outlined in the section "**Specifying a Custom Color**" on page 3-12.

Configuring the Moving Box Test Feature

The **Moving Box** feature enables an overlay in the shape of a box that moves across the screen in a pre-determined pattern.

Note — *If Freeze is selected for the Loss of Input Video setting and the input video signal is lost, the Moving Box test feature remains active (the box continues to move across the screen.)*

To configure the moving box test feature

1. From the **Device View** in DashBoard, select the **Setup** tab.

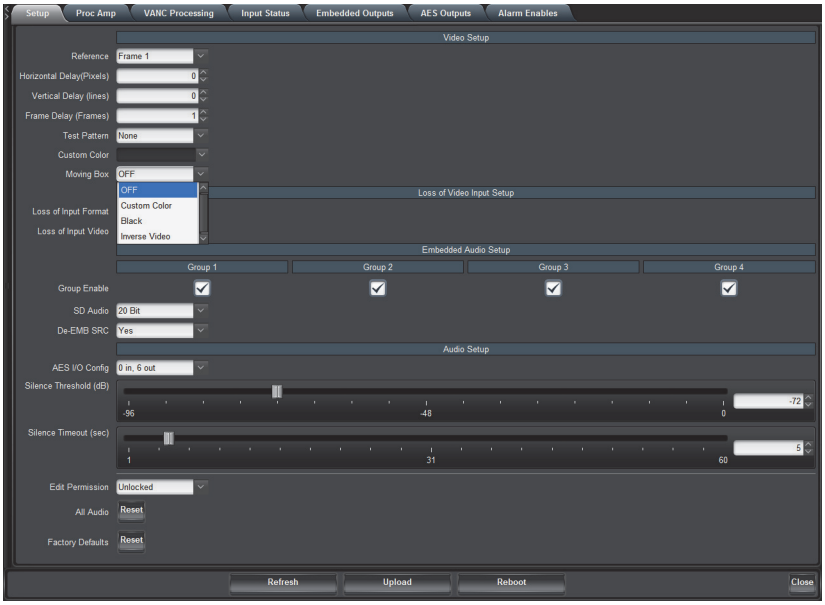

Setup Tab — Moving Box Menu

2. Use the **Moving Box** menu to specify the fill of the box or disable this feature. Refer to **Table 6.4** on page 6-6 for details.

3. If you selected **Custom Color** in step 2., specify the color fill for the box as outlined in the section "**Specifying a Custom Color**" on page 3-12.

Specifying the Output During a Loss of Input

The card enables you to specify the output during a loss of input, or during a change of input format. The embedded audio will also go silent if passing from input to output (when another audio is not selected).

To specify the output if the video input is lost

1. From the **Device View** in DashBoard, select the **Setup** tab.

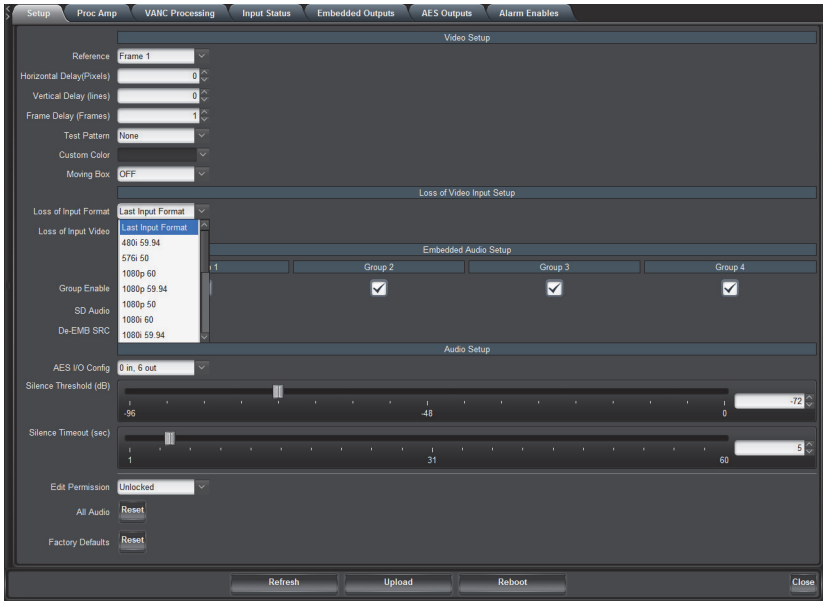

Setup Tab — Loss of Input Format Menu

2. Use the **Loss of Input Format** menu to specify the output video format when the card experiences a loss of input. Refer to **Table 6.4** on page 6-6 for a list of options.

3. Use the **Loss of Input Video** menu to specify what to output when the card experiences a loss of input. Refer to **Table 6.4** on page 6-6 for a list of options.

Note — *If you selected Freeze, ensure that the Loss of Input Format field is set to the same format as the input video signal or to Last Input Format. If not, the card will not output a Freeze Frame, but a full Field Black image in the format selected in the Loss of Input Format field.*

4. If you selected **Custom Color** in step 3, specify the color to use as outlined in the section "**Specifying a Custom Color**" on page 3-12.

Specifying a Custom Color

The card provides an HSL color space to edit the Hue, Saturation, and Luminance levels of a custom color. You can assign this Custom Color as the Test Pattern, the output during a loss of input signal, or as the fill for the Moving Box test feature.

Note — *The Transparency menu is not implemented.*

To specify a custom color

1. From the **Device View** in DashBoard, select the **Setup** tab.
2. Select the **Custom Color** menu to display the **Custom Color** dialog.

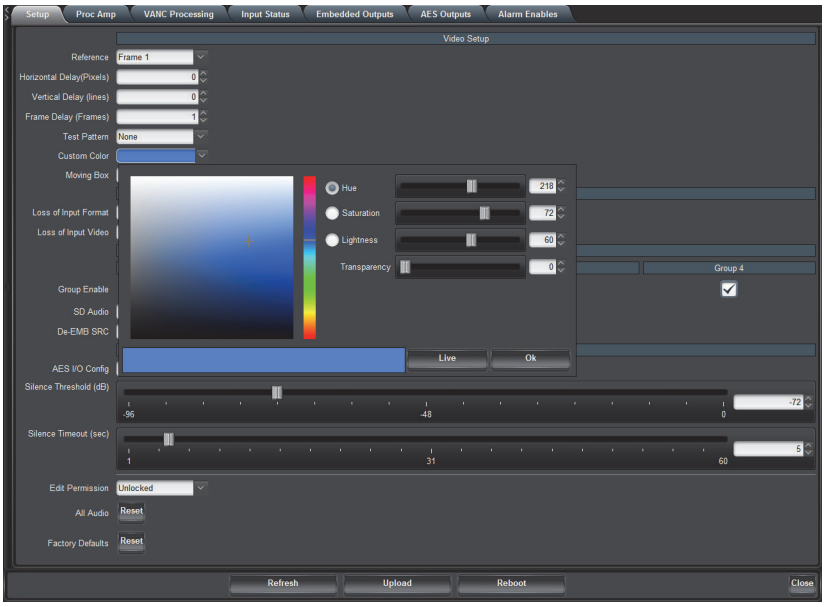

Setup Tab — Custom Color Dialog

3. Use the **Hue** options to specify whether the color is red yellow, green, blue, purple etc. Or you can select the hue from the provided vertical color grid in the dialog.
4. Use the **Saturation** options to specify the depth of the color.
5. Use the **Lightness** options to specify the amount of white or black mixed with the hue selected in step 3.
6. Confirm that the field beneath the color grids displays the selected color.
7. Apply your changes using one of the following options:
   - Click **Live** to preview the color scheme and apply it but not close the **Custom Color** dialog; or
   - Click **OK** to apply the new color scheme and close the dialog.

Audio Setup

In This Chapter

This chapter provides a general overview of the options in DashBoard for configuring the audio features of your card.

The following topics are discussed:

- Selecting an AES Configuration
- Configuring the AES Inputs
- Configuring the AES Outputs
- Configuring the Analog Inputs
- Configuring the Analog Outputs
- Embedded Outputs
- Embedding PCM and Non-PCM Signals

Selecting an AES Configuration

Depending on the card model, you can configure the number of AES inputs and outputs. **Table 1.1** on page 1-2 outlines the audio mode options for each card model.

For More Information on...

- the menus and parameters available in the **AES I/O Config** menu of the **Setup** tab, refer to the section "**Setup Tab**" on page 6-6.
- alarm options for AES sources, refer to the section "**Alarm Enables Tab**" on page 6-19.

To specify the AES configuration

1. From the **Device View**, select the **Setup** tab.

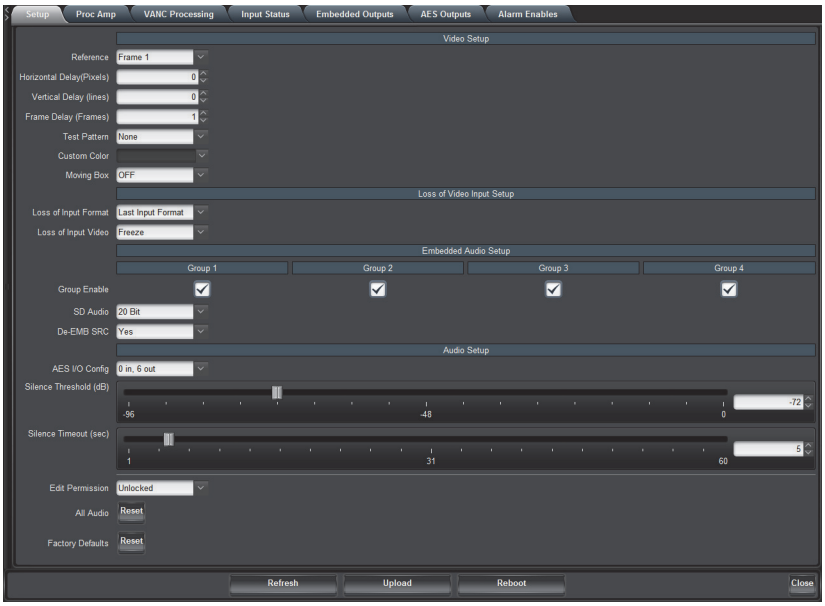

Setup Tab — SFS-8622-A

2. Specify the configuration for your card by selecting an option from the **AES I/O Config** menu.

Note — *Changing the AES I/O Config setting will default audio source settings if they become invalid.*

3. If you have selected a configuration with AES inputs, proceed to the section "**Configuring the AES Inputs**" on page 4-4.
4. If you have selected a configuration with AES outputs, proceed to the section "**Configuring the AES Outputs**" on page 4-5.
5. Use the **SD Audio** menu to specify the type of SD audio to embed. Refer to **Table 6.4** on page 6-6 for a list of options.

Note — *The card will detect and indicate async for any audio input that is an asynchronous audio input, or has a sample rate other than 48kHz.*

6. Use the **De-EMB SRC** menu to apply the Sample Rate Converter on all de-embedded audio groups from the input source.

Note — *When the De-EMB SRC is enabled, the Word Length status field always reports that the audio word length is 24bit.*

7. Use the **Silence Threshold** slider to specify a threshold value for silence. Audio with an amplitude (dBFS) equal to or below this value will be considered silent.
8. Use the **Silence Timeout** slider to define how long (in seconds) that audio is silent before an alarm is raised in the **Audio Status** field of the **Signal** tab.

Configuring the AES Inputs

The rear module accepts synchronous AES audio input streams at 48kHz or any asynchronous AES streams from 32kHz to 96kHz with SRC enabled. Note that SRC should only be used with Pulse Code Modulation (PCM) digital audio and not any form of compressed signal, such as Dolby®.

This section briefly summarizes how to configure the options in the **AES Inputs** tab when the AES I/O Config is set to include AES inputs.

To configure the AES inputs

1. From the **Device View**, select the **AES Inputs** tab.

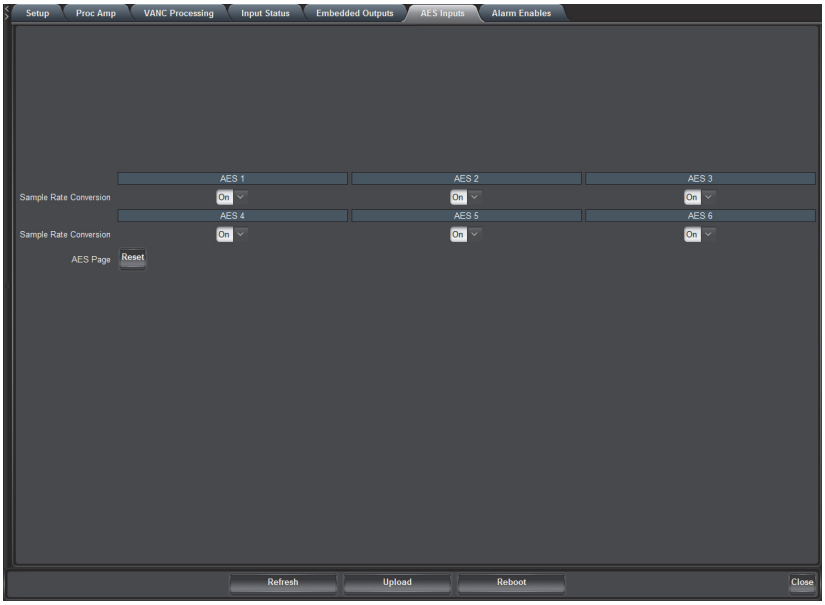

AES Inputs Tab — AES IO Config is set to 6 in, 0 out

2. To enable the SRC of the AES source, select the **Sample Rate Conversion** box.

Configuring the AES Outputs

This section briefly summarizes how to configure the options in the AES Outputs tab when the AES I/O Config is set to include AES outputs. The number of sub-tabs available depends on the number of AES outputs you have selected.

The embedded audio output Proc Amp adjustments are applied in the following order:

1. **Delay** — This option enables you to adjust the delay of the audio channel. If you have enabled the Delay Lock feature, changing the delay value for one channel automatically changes the value for the other channel.
2. **Gain** — This option provides a +/- 20dB gain range in 1dB increments. If you have enabled the Gain Lock feature, changing the gain value for one channel automatically changes the value for the other channel.
3. **Invert** — This option enables you to invert the polarity of the audio signal for the selected channel.
4. **Sum** — This option enables both channels to carry the average of the two selected input channels (A+B/2).

To configure the AES outputs

1. From the **Device View**, select the **AES Outputs** tab.

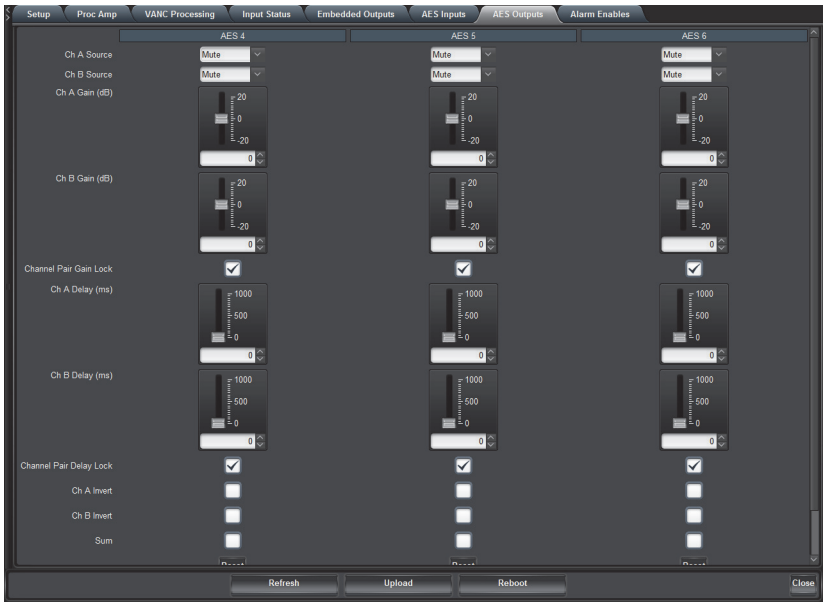

AES Outputs Tab — AES IO Config is set to 3 in, 3 out

2. Use the associated **Ch# Source** menu to specify the channel source of an AES output.
3. To set the gain for a channel of an AES output, use the associated **Ch # Gain** slider to select a value between -20dB and 20dB.
4. To set the delay for a channel of an AES output, use the associated **Ch # Delay** slider to select a value between 0ms and 500ms.
5. To invert a channel of an AES output, select the associated **Ch # Invert** box.
6. To sum the input (A+B/2) of the AES output, select the **Sum** box.
7. Repeat steps 2.- 6. for each AES output you wish to configure.

Configuring the Analog Inputs

For each analog input, you can adjust the volume of the input analog audio channel in increments of 0.5dB. This enables you to fine tune the balance of each input. You can also choose to have the Audio Status field in DashBoard report when the card detects that a specific analog input is silent. These options are only available when using an SFS-8622-IC or SFS-8622-AIC.

To trim an analog input

1. From the **Device View**, select the **Analog Inputs** tab.

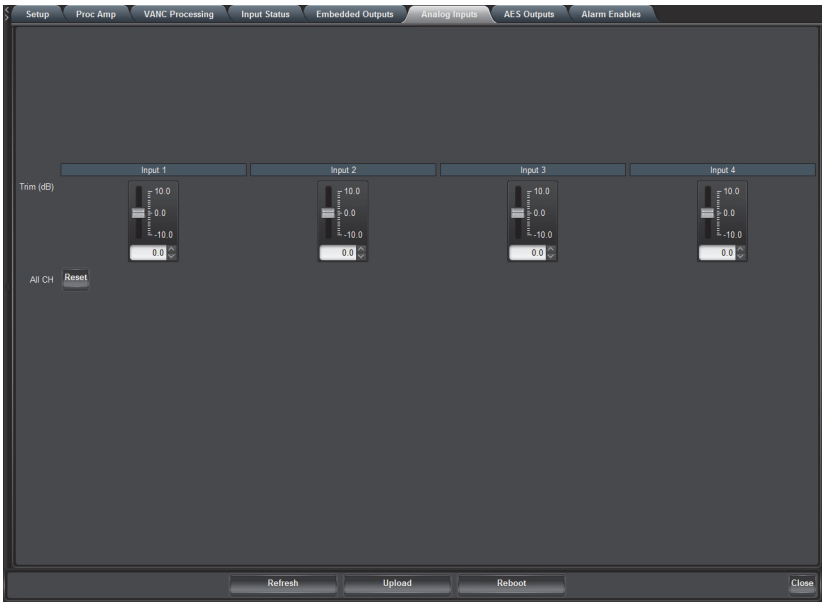

Analog Inputs Tab — SFS-8622-AIC

2. Use the associated **Trim** slider for an analog input to select a trim value between -10dB and 10dB.

To configure the analog inputs alarm

1. From the **Device View**, select the **Alarm Enables** tab.
2. Locate the **Analog Inputs** area in the **Alarm Enables** tab. You may need to scroll down the tab.
3. In the **Analog Inputs** area, select the box for each input you wish to monitor via the **Audio Status** field in the **Signal** tab.



Alarm Enables Tab — Analog Inputs 1, 2 are Selected

Configuring the Analog Outputs

For each analog output you can assign any of the input audio channels or test tone, add an offset, or invert the input channels. You can also adjust the volume of the analog audio output in increments of 0.5dB, enabling you to fine tune the balance of each output. These options are only available when using an SFS-8622-OC or SFS-8622-AOC.

To configure an analog output

1. From the **Device View**, select the **Analog Outputs** tab.

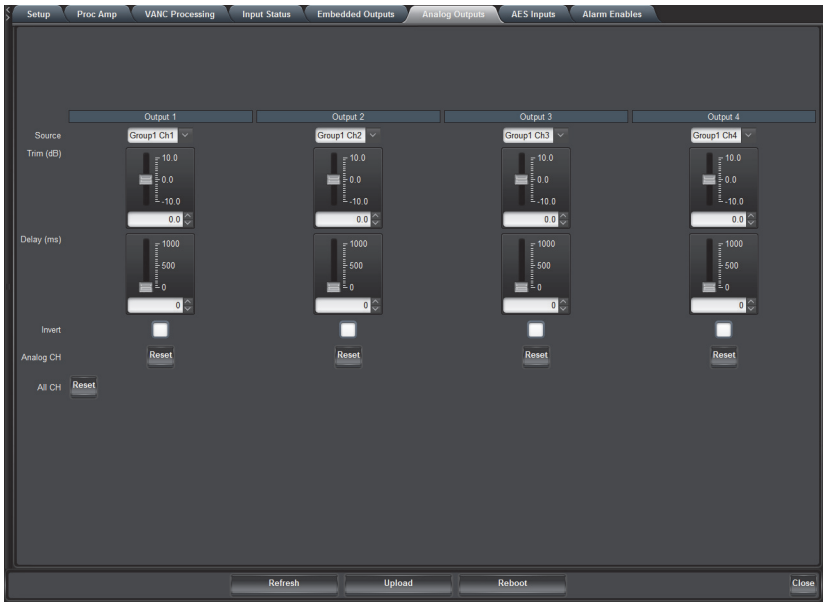

Analog Outputs Tab — SFS-8622-AOC

2. Use the associated **Source** menu to specify the channel source of an analog output.
3. Use the associated **Trim** slider for an analog output to select a trim value between -10dB and 10dB.
4. To set the delay for a channel of an analog output, use the associated **Delay** slider to select a value between 0ms and 1000ms.
5. To invert a channel of an analog output, select the associated **Invert** box.

To configure the analog outputs alarms

1. From the **Device View**, select the **Alarm Enables** tab.
2. Locate the **Analog Outputs** area in the **Alarm Enables** tab. You may need to scroll down the tab.
3. In the **Analog Outputs** area, select the **Source Missing** box for each input you wish to monitor via the **Audio Status** field in the **Signal** tab. An alarm message will display when the select input is not detected by the card.
4. In the **Analog Outputs** area, select the **Source Async** box for each input you wish to monitor via the **Audio Status** field in the **Signal** tab. An alarm message will display when the select input is detected as asynchronous to the card's reference timing.

Embedded Outputs

Your card also includes options for configuring how audio is embedded for SDI video outputs.

For More Information on...

- the embedded audio menus and parameters available in the **Setup** tab, refer to the section "**Setup Tab**" on page 6-6.
- the embedded output settings, refer to the section "**Embedded Outputs Tab**" on page 6-14.

Setting up Embedded Outputs

Before proceeding, you will need to configure some of the embedded audio options in the **Setup** tab.

To set up the embedded audio for an output source

1. From the **Device View**, select the **Setup** tab.

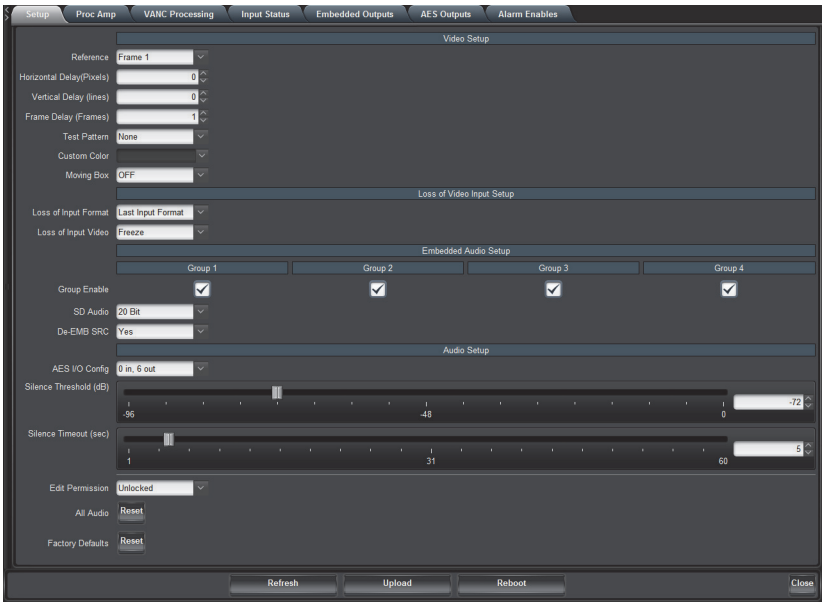

Setup Tab — SFS-8622-A

2. In the **Embedded Audio Setup** area, select the **Enable** box for the group(s) to embed in the video output.
3. Use the **SD Audio** menu to specify the type of SD audio to embed. Refer to **Table 6.4** on page 6-6 for a list of options.
4. Use the **De-EMB SRC** menu to apply the Sample Rate Converter on all de-embedded audio groups from the input video source. Refer to the section "**Embedding PCM and Non-PCM Signals**" on page 4-11 for details.

Note — *When the De-EMB SRC is enabled, the Word Length status field always reports that the audio word length is 24bit.*

5. Use the **Silence Threshold** slider to specify a threshold value for silence. Audio with an amplitude (dBFS) equal to or below this value will be considered silent.

6. Use the **Silence Timeout** slider to define how long (in seconds) that audio is silent before an alarm is raised in the **Audio Status** field of the **Signal** tab.

Configuring the Embedded Output Groups

This section briefly outlines how to configure the options in the **Embedded Output** tab. Refer to **Table 6.9** on page 6-14 for details on the options in this tab.

The embedded audio output Proc Amp adjustments are applied in the following order:

1. **Delay** — This option enables you to adjust the delay of the audio channel. If you have enabled the Delay Lock feature, changing the delay value for one channel automatically changes the value for the other channel.
2. **Gain** — This option provides a +/- 20dB gain range in 1dB increments. If you have enabled the Gain Lock feature, changing the gain value for one channel automatically changes the value for the other channel.
3. **Invert** — This option enables you to invert the polarity of the audio signal for the selected channel.
4. **Sum** — This option enables both channels to carry the average of the two selected input channels (A+B/2).

To configure the embedded audio outputs

1. From the **Device View**, select the **Embedded Outputs** tab.

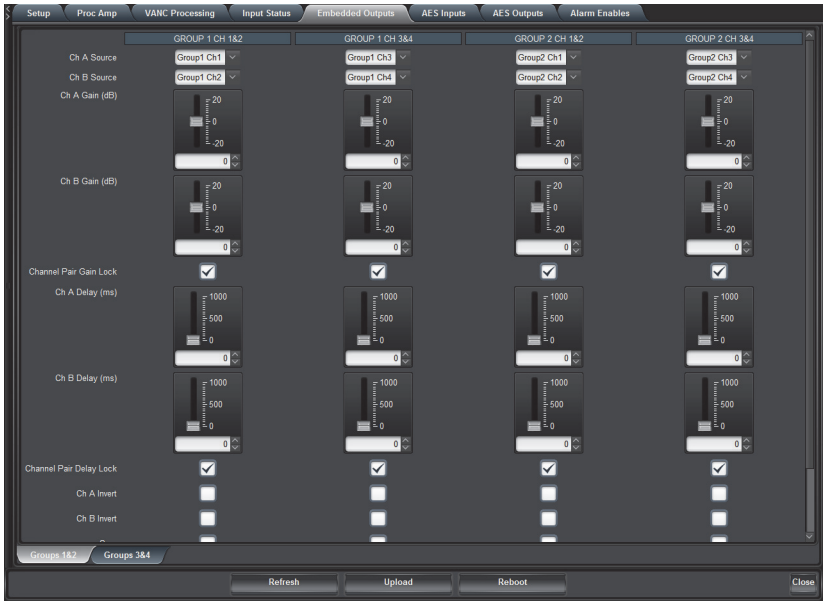

Embedded Outputs — SFS-8622-A, Groups 1&2 Tab

2. If required, select the sub-tab that includes the embedded group you wish to configure.
3. To map a channel:
   - From the associated **Ch # Source** menu, select an audio source that is inserted into the embedded group if present. Refer to **Table 6.9** on page 6-14 for a list of options.
   - If the selected source is not present on the input video, silence is embedded.
4. To set the gain for an output channel, use the associated **Ch # Gain** slider to select a value between -20dB and 20dB.

5. To set the delay for an output channel, use the associated **Ch # Delay** slider to select a value between 0ms and 1000ms.
6. To invert an output channel, select the associated **Ch # Invert** box.
7. To sum the output channel pair (A+B/2), select the **Sum** box.
8. Repeat steps 2.- 7. for each output channel you wish to configure.
9. Repeat for each group/channel pair you wish to configure.

Embedding PCM and Non-PCM Signals

This section provides additional information on the Processing Amplifiers (Proc Amps) for the audio outputs on the card.

Embedding PCM Signals

Each card can embed PCM audio from two sources: the AES input or from the embedded audio of the source video. Processing also includes embedding channel status data as per **Table 7.9**.

Embedding Non-PCM Signals

You can configure the card to embed non-PCM signals, such as Dolby® Digital and Dolby® E, using the options available in DashBoard. However, when embedding the non-PCM signal, the A and B channels of the input signal must be embedded on Channels 1 and 2, or Channels 3 and 4 of a given group. For example, you would embed AES1A in Group1Ch1, and AES1B in Group1Ch2.

To embed non-PCM signals

1. Display the **Device View** in DashBoard for the card you wish to configure.
2. Select the **AES Inputs** tab.
3. Set the **Sample Rate Conversion** to **Off** for the required AES or embedded source.
4. Select the **Embedded Outputs** tab.
5. In the **Embedded Outputs** tab, select the sub-tab for the output group that you wish to configure.
6. Clear the applicable **Sum** box to disable the channel summing.
7. Set the applicable **Ch # Gain** to **0**.
8. Clear the applicable **Ch # Invert** box to disable inverting on the channel.
9. Ensure that the **Delay** values of the channels match.

Card-edge Monitoring

In This Chapter

This chapter provides a general overview of the user controls available on the card.

The following topics are discussed:

- Card Overview
- Control and Monitoring Features

Card Overview

This section provides a general overview of the card components. For information on the LEDs available on the card-edge, refer to the section "**Control and Monitoring Features**" on page 5-3.

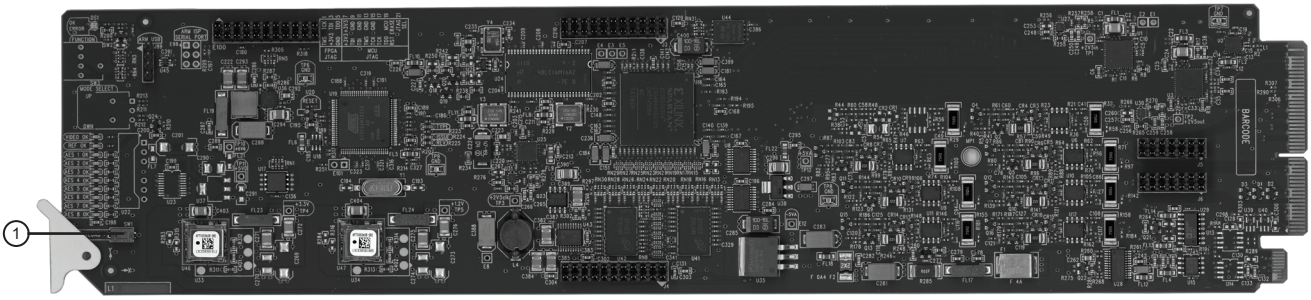

Figure 5.1 *Card Components — SFS-8622-A*

1. Bootload Button (SW1)

SW1 is used for factory service in the unlikely event of a complete card failure. Do not press this button unless instructed to do so by Ross Technical Support personnel.

For More Information on...

- the LEDs located on the card-edge, refer to the section "**Control and Monitoring Features**" on page 5-3.

Control and Monitoring Features

This section provides information on the card-edge LEDs. Refer to **Figure 5.2** for the location of the LEDs.

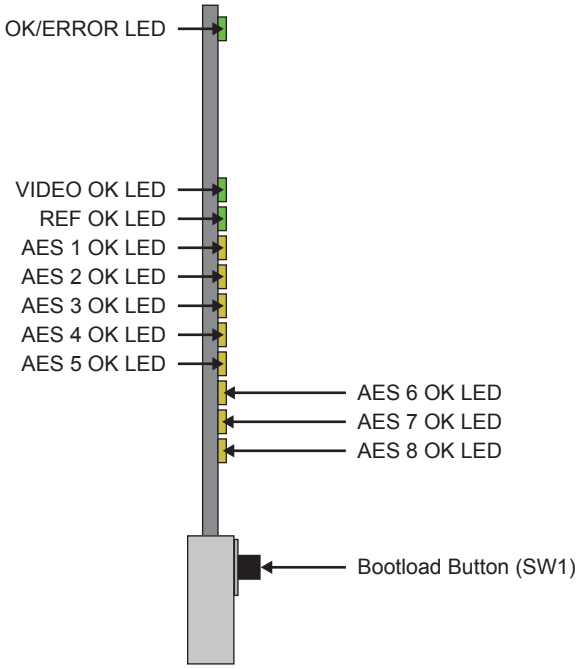

***Figure 5.2** Card-edge LEDs*

Status and Selection LEDs

Basic LED displays and descriptions are provided in **Table 5.1**.

Table 5.1 Card-edge LEDs

LED	Color	Display and Description
OK/ERROR	Green	When lit green, this LED indicates that the card is functioning normal and that no anomalies have been detected. The following conditions must be satisfied: • a valid input signal is present • a valid reference signal is present when a reference is required, and that the reference standard matches the input standard.
	Flashing Green	When flashing green, this LED indicates the bootloader is waiting for a software upload.
	Flashing Green and Orange	When lit green with flashing orange, this LED indicates there is a signal error such as a missing or invalid input or reference.
	Red	When powering on, this LED will be lit red momentarily as the card boots. If lit red for more than 3 seconds, this LED indicates the card is not operational.
		When lit red, this LED indicates the card is not operational.
	Off	When off, this LED indicates there is no power to the card.

Table 5.1 Card-edge LEDs

LED	Color	Display and Description
VIDEO OK	Green	When lit, this LED indicates that the video input is valid.
	Flashing Green	When flashing, this LED indicates that video is present, but the input format is unsupported.
	Off	When unlit, this LED indicates the absence of an input signal.
REF OK	Green	When lit green, this LED indicates a valid reference signal.
	Off	When unlit, this LED indicates that a reference signal is not present, or is not supported.
AES #	Yellow	SFS-8622-A, SFS-8622-B, SFS-8622-AIC, SFS-8622-AOC— When lit, an LED indicates a valid signal is detected on the corresponding AES input. SFS-8622-IC — When lit, an LED indicates a valid and not silent signal is detected on the corresponding analog input. SFS-8622-OC — These LEDs are not implemented.
	Off	SFS-8622-A, SFS-8622-B, SFS-8622-AIC, SFS-8622-AOC— When unlit, an LED indicates that a valid signal is not detected on the corresponding AES input. SFS-8622-IC — When unlit, an LED indicates the corresponding analog signal is silent. SFS-8622-OC — These LEDs are not implemented.

DashBoard Menus

In This Chapter

This chapter summarize the menus, items, and parameters available from DashBoard for your card. Parameters marked with an asterisk (*) are the factory default values.

Operating Tip — *Wait 30 seconds after the last setting change to ensure all changes are saved to the non-volatile memory of the card.*

The following topics are discussed:

- Status Tabs
- Setup Tab
- Proc Amp Tab
- VANC Processing Tab
- Input Status Tab
- Embedded Outputs Tab
- Analog Inputs Tab
- Analog Outputs Tab
- AES Inputs Tab
- AES Outputs Tabs
- Alarm Enables Tab

Status Tabs

This section summarizes the read-only information displayed in the Status tabs. The fields in the **Status** tabs vary in severity from green (valid), yellow (caution), to red (alarm). DashBoard reports the most severe alarm for a single field.

Signal Tab

Table 6.1 summarizes the read-only information displayed in the **Signal** tab.

Table 6.1 Signal Tab Items

Tab Title	Item	Parameters	Description
General	SDI Status	OK	A valid SDI signal is detected on the input, the format is supported, and the selected reference signal is supported and compatible
		No Input	An invalid SDI signal is detected on the input
		Incompatible	A valid SDI signal is detected on the input, the format is supported but the selected reference format selected is not compatible (e.g. an 480i input with a PAL reference signal)
		Non-Sync Video	A valid SDI signal is detected on the input, the format is supported, the selected reference format is supported but a reference lock is not occurring
		Group Not Present	At least one embedded audio group is missing from the valid, supported format SDI input signal
		Group Channel Silent	At least one embedded audio channel from the valid, supported SDI input signal has an amplitude at or below the Silence Threshold
	Audio Status	OK	A valid AES signal (PCM or non-PCM) is detected on all the inputs
		Source Missing	No valid AES signal detected on at least one input
		Source Async	At least one AES input is non-synchronous relative to the selected reference source on the receiving card
		AES Input Silent	At least one AES input signal has an amplitude at or below the Silence Threshold
		AES Input Not Present	At least one AES input signal is not detected

Table 6.1 Signal Tab Items

Tab Title	Item	Parameters	Description
General	Audio Status	Analog Input Silent	The analog input signal has an amplitude at or below the Silence Threshold. This message is only available for the SFS-8622-IC.
		Analog Input Not Present	The analog input signal is not detected. This message is only available for the SFS-8622-IC.
		Group 4 Reduced to 20bit	Reduces Group 4 of the embedded audio to 20bit while the other three groups of embedded audio are 24bit
	Reference Status	OK	Indicates that a valid reference source is present
		No Ref - Video	The following conditions are occurring: • Card reference is set to Frame 1 or Frame 2 • A valid reference signal is not present • Card has gone to Video Timing Mode
		No Ref - Free Run	First possible error condition: • Card detects an invalid or absent video signal. • A valid reference signal is not present. • The **Reference** menu is set to **Frame 1** or **Frame 2**. Second possible error condition: • Card detects an invalid or absent video signal. • The **Reference** menu is set to **Video**.
	Input Format	#	Indicates the input video format
	Reference Format	#	Indicates the reference video format
	Output Format	#	Indicates the output video format
	Input Timing	Lines: #, Pixels: #	Indicates the timing offset between the video input signal and the reference signal. The unit of measure is lines and pixels with respect to the input video format.
	Embedded Audio Status - Group #	PCM	Indicates the status of the specified embedded audio group
		No Input	
		PCM-Silent	
		Non-PCM	
		Async	
		Mixed[a]	
		Not Present	One of the audio channel pairs are not detected

Table 6.1 Signal Tab Items

Tab Title	Item	Parameters	Description
AES Inputs	AES #	PCM	Indicates the presence of the specified AES input
		No Input	
		AES Input Async	
		PCM-Silent	
		Non-PCM	
		Async	
		Mixed[a]	

a. The status of each channel in the pair is different. For example, Channel A is PCM audio but Channel B is non-PCM audio.

Hardware Tab

Table 6.2 summarizes the read-only information displayed in the **Hardware** tab.

Table 6.2 Hardware Tab Items

Tab Title	Item	Parameters	Description
Hardware	HW Status	OK	Indicates any problems with the card hardware components
		FPGA load invalid	
		Incomp I/O module	
		Current out of spec	
		Internal Error	
	Voltage (mV)	#	Supply Voltage
	Current (mA)	#	Current consumption in milliamperes
	CPU Headroom	#	Processing power available
	RAM Available	#/##	On-board processing memory available
	Uptime (h)	#	Displays the number of hours since the last reboot of the card
	Configuration Bank	#	Storage count

Product Tab

Table 6.3 summarizes the read-only information displayed in the **Product** tab.

Table 6.3 Product Tab Items

Tab Title	Item	Parameters	Description
Product	Product	SFS-8622-#	Indicates the product name
	Supplier	Ross Video Ltd.	Indicates the manufacturer of your card
	Board Rev	##	Indicates the board version of your card
	Rear Module	#	Type of rear module in the slot
	Board S/N	######	Indicates the serial number of your card
	Software Rev	##.##	Indicates the software version
	Firmware Rev	#.###	Indicates the firmware version
	Daughter Card Type	##	Indicates if a daughter card is installed

Setup Tab

Table 6.4 summarizes the **Setup** options available in DashBoard.

Table 6.4 Setup Menu Items

Menu Title	Item	Parameters	Description
Video Setup	Reference	Frame 1*	Assigns the external analog reference connected to **REF 1** port on the openGear frame
		Frame 2	Assigns the external analog reference connected to **REF 2** port on the openGear frame
		Video	Reference is taken from the **SDI IN** video input on the rear module
	Horizontal Delay (Pixels)	0* - #	Adjusts the horizontal delay with respect to the selected reference. Refer to **Table 3.2** on page 3-5 for value ranges.
	Vertical Delay (lines)	0* - #	Specifies the vertical delay with respect to the selected reference. Refer to **Table 3.2** on page 3-5 for value ranges.
	Frame Delay (Frames)	0 - #[a]	Specifies the number of frames of delay with respect to the selected reference
	Test Pattern	None*	Disables the test pattern feature
		Black	Specifies the type of test pattern to output. Note that the test pattern replaces all of the output picture but not the HANC, while the VANC is blanked.
		Blue	
		Custom Color	
		75% Color Bars	
		100% Color Bars	
		75% SMPTE Bars	
		Matrix Pathological	
		Luma Ramp	
		Y/C Ramp	
	Custom Color	#	Select this drop down to display a dialog that enables you to configure the Custom Color setting. This Custom Color will be used as a Test Pattern, Loss of Input, and the Moving Box fill when those menus are set to Custom Color.
	Moving Box	OFF*	Disables this feature
		Custom Color	An overlay in the shape of a box, filled with the specified custom color, moves across the screen in a pre-determined pattern

Table 6.4 Setup Menu Items

Menu Title	Item	Parameters	Description
Video Setup	Moving Box	Black	An overlay in the shape of a box, filled with black, moves across the screen in a pre-determined pattern
		Inverse Video	An overlay in the shape of a box, filled with the inverse image of the current video signal, moves across the screen in a pre-determined pattern
Loss of Video Input Setup	Loss of Input Format	Last Input Format*	Forces the output video standard to match the last detected and valid input signal format.
		#	Forces the output video standard to match the specified video signal format
	Loss of Input Video	Black	Specifies the video output in the event of a loss of video input.
		Blue	
		Custom Color	Sets the output to a custom color in the event of a loss of video input. Use the provided Custom Color menu to configure the color.
		75% SMPTE Bars	Specifies the video output in the event of a loss of video input
		Matrix Pathological	
		Freeze*	Displays the last captured frame of video from the input signal. Ensure that the Loss of Input Format is set to the same format as the input video signal or set to Last Input Format. Note that a valid input signal must be captured in order that the output video is valid.
Embedded Audio Setup	Group Enable - Group #	Selected*	Determines if the specified audio group is inserted in the SDI video output or not
		Cleared	
	SD Audio[bc]	20 Bit*	Embeds 20bits
		24 Bit	Embeds 24bits
		Auto	Embeds 20-24bit depending on the audio source and the number of bits (only applies to SD formats)
	De-EMB SRC	No	Sample Rate Converter (SRC) is not applied, before the Frame Sync, to any of the audio channels in the SDI input
		Yes*	Applies the SRC on the audio channels in the video input before processed by the Frame Sync

Table 6.4 Setup Menu Items

Menu Title	Item	Parameters	Description
Audio Setup	AES I/O Config[d]	6 in, 0 out	Card is configured to manage six AES inputs and no AES outputs. This option is only available for the SFS-8622-A.
		0 in, 6 out	Card is configured to manage six AES outputs and no AES inputs. This option is only available for the SFS-8622-A.
		3 in, 3 out	Card is configured to manage three AES inputs and three AES outputs. AES connections 1-3 on the rear module are now configured as inputs. AES connections 4-6 on the rear module are now configured as outputs. This option is only available for the SFS-8622-A.
		8 in, 0 out	Card is configured to manage eight AES inputs and no AES outputs. This option is only available for the SFS-8622-B
		0 in, 8 out	Card is configured to manage eight AES outputs and no inputs. This option is only available for the SFS-8622-B.
		4 in, 0 out	Card is configured to manage four AES inputs and no AES outputs. This option is only available for the SFS-8622-AOC and SFS-8622-AIC. The analog I/O are not affected.
		0 in, 4 out	Card is configured to manage no AES inputs, but does manage four AES outputs. This option is only available for the SFS-8622-AOC and SFS-8622-AIC. The analog I/O are not affected.
	Silence Threshold (dB)[e]	-96 to 0	Audio equal to or less than the specified threshold value is considered silent
	Silence Timeout (sec)[f]	1 to 60	Audio silent for longer than the specified value raises an alarm
	Analog Output # De-Emphasis[g]	Off*	Analog de-emphasis is always disabled
		On	Analog de-emphasis is always enabled
		Auto	Analog de-emphasis is enabled depending on the channel status emphasis bit
	Edit Permission	Unlocked*	All menu options are unlocked and can be edited
		Locked	All menu items, except this one, are locked and read-only
	All Audio	Reset	Resets only the settings in the AES Inputs and Embedded Outputs tabs to factory defaults
	Factory Defaults	Reset	Resets all settings to factory defaults except for the AES I/O Config setting

a. The default value is 1.
b. When performing an analog to digital conversion of audio, the card produces 24bit resolution by default. When converting, ensure that you set the **SD Audio** option in the **Setup** tab to **20bit**. Otherwise, the card will output 24bit and an alarm is reported in the **Audio Status** field.
c. This menu is only applicable when using SD formats.
d. This menu is not available for the SFS-8622-IC or SFS-8622-OC.
e. The default value is -72dB.
f. The default value is 5 seconds.
g. This menu is only available for the SFS-8622-OC and SFS-8622-AOC.

Proc Amp Tab

Table 6.5 summarizes the **Proc Amps** options available in DashBoard.

Table 6.5 Proc Amps Menu Items

Menu Title	Item	Parameters	Description
	Enable	Selected	Enables the Proc Amp using the displayed settings for the selected output
		Cleared*	The Proc Amp color correction is not applied to the selected output. Note that the Proc Amp controls are not applied when the output is Test Pattern.
	Video Gain (%)	0 to 200[a]	Adjusts the output video gain level
	Chroma Gain (%)	0 to 200[a]	Adjusts the card output chroma gain percentage (C_b and C_r simultaneously)
	CB Gain (%)	0 to 200[a]	Adjusts the output C_b gain
	Black Offset (IRE)	-8 to 100[b]	Adjusts the output black level of the card
	Proc Amp	Reset	Resets all Proc Amp controls to the factory default values

a. The default value is 100.
b. The default value is 0.

VANC Processing Tab

Table 6.6 summarizes the **VANC Processing** options available in DashBoard.

Note — *Use the **1080i** sub-tab when using an 1080pSF input signal.*

Table 6.6 VANC Processing Menu Items

Menu Title	Item	Parameters	Description
480, 576, 1080i	Line	#[a]	Indicates the specific line the VANC components will be deleted from
	Field #	Pass*	VANC components are passed unmodified to the card output
		Strip	VANC components are deleted from the card output
720, 1080p	Line	#[a]	Indicates the specific line the VANC components will be deleted from
	Option	Pass*	VANC components are passed unmodified to the card output
		Strip	VANC components are deleted from the card output
	All Lines	Pass	All VANC components are passed unmodified to the card output
		Strip	All VANC components are deleted from the card output

a. The range is dependent on the format.

Input Status Tab

This section summarizes the sub-tabs available in the **Input Status** tab.

Video Input & Embedded Tab

Table 6.7 summarizes the read-only information displayed in the **Video Input & Embedded** sub-tab.

Table 6.7 Video Input & Embedded Menu Items

Menu Title	Item	Parameters	Description
	Input Format (read-only)	#	Format of the video input
	Input Errors (read-only)	#	Displays the count of the CRC errors on the video input. This 14bit counter is reset on loss of video, or when the **Reset** button is selected. The counter is non-latching, and rolls over from maximum count to zero. • SD formats — displays both active picture and full frame errors • HD, 3G formats — displays the total count of errors
	Error Count	Reset	Resets the CRC Errors field
Embedded Audio - Group #	Channel # (read-only)	PCM	Status of each group and channel of embedded audio
		No Input	
		PCM-Silent	
		Non-PCM	
		Async	
	Word Length (read-only)	#bit	Word length of the audio in number of bits

Audio Tab

Table 6.8 summarizes the read-only information displayed in the **Audio** sub-tab.

Table 6.8 Audio Menu Items

Menu Title	Item	Parameters	Description
AES #	Ch # Status	No Input	Displays the status of the specified Channel input
		PCM	
		PCM-silent	
		Non-PCM	
		Async[a]	
	Word Length	#bit	Displays the number of bits of audio

Table 6.8 Audio Menu Items

Menu Title	Item	Parameters	Description
AES #	Emphasis	Present	The incoming AES signal is indicating 50/15 or CCiTT J.17 emphasis
		Not Present	The incoming AES signal is indicating no emphasis or the emphasis is not indicated
	Sample Rate	#	Displays the sample rate of the AES input

a. If the SRC is ON, an async AES signal is processed to be PCM and indicated as such.

Embedded Outputs Tab

Table 6.9 summarizes the **Embedded Outputs** options available in DashBoard. Note that Groups 1 and 2 are located on the first sub-tab, while Groups 3 and 4 are on the second sub-tab.

Table 6.9 Embedded Outputs Menu Items

Menu Title	Item	Parameters	Description
GROUP # **CH #**	Ch # Source	Mute	Configures the input source for the specified channel that is inserted in to the embedded group (if present)
		Group# Ch#*	
		Analog #[a]	
		AES #	
		#Hz Tone	
		#kHz Tone	
	Ch # Gain (dB)	-20 to +20[b]	• Adjusts the gain of the specified channel of audio • Select 0 when using non-PCM audio data
	Channel Pair Gain Lock	Selected*	Locks the Gain sliders of both channels together. If the values for the two channels are different, that change is maintained when the channels are locked.
		Cleared	Unlocks the Ch Gain sliders
	Ch # Delay (ms)	0* to 1000	Adjusts the delay of the specified audio channel
	Channel Pair Delay Lock	Selected*	Locks the Ch Delay slider of both channels together. If the values for the two channels are different, that change is maintained when the channels are locked.
		Cleared	Unlocks the Ch Delay sliders
	Ch # Invert	Selected	Inverts the audio signal of the specified channel
		Cleared*	• Audio signal of the specified channel is not inverted • Use for non-PCM audio data
	Sum	Selected	Both channels will carry the average of the two input channels (A+B/2)
		Cleared*	Disables this feature
	Channel Pair	Reset	Resets the settings for the specified channel pair only to the default values
	Groups #	Reset	Resets the settings for all groups of the specified sub-tab to the default values

a. This option is only available for the SFS-8622-IC and SFS-8622-AIC.
b. The default value is 0.

Analog Inputs Tab

Table 6.10 summarizes the **Analog Inputs** tab available in DashBoard. Note that this tab is only available for the SFS-8622-IC and SFS-8622-AIC.

Table 6.10 Analog Inputs Menu Items

Menu Title	Item	Parameters	Description
Input #	Trim (dB)	-10 to 10[a]	Adjusts the volume level of the analog signal for the specified input
	All CH	Reset	Resets the trim level to 0dB for all analog inputs

a. The default value is 0.

Analog Outputs Tab

Table 6.11 summarizes the **Analog Outputs** tab available in DashBoard. Note that this tab is only available for the SFS-8622-OC and SFS-8622-AOC.

Table 6.11 Analog Outputs Menu Items

Menu Title	Item	Parameters	Description
Output #	Source	Mute	Specifies the source for the analog output
		Group# Ch#*	
		AES #	
		#Hz Tone	
		#kHz Tone	
	Trim (dB)	-10 to 10[a]	Adjusts the volume level of the analog signal for the specified input.
	Delay (ms)	0* to 1000	Adjusts the delay of the specified output audio channel
	Invert	Selected	Inverts the audio signal of the specified channel
		Cleared*	• Audio signal of the specified channel is not inverted • Use for non-PCM audio data
	Analog CH	Reset	Resets the settings for the specified output
	All CH	Reset	Resets the settings for all channels to the default values

a. The default value is 0.

AES Inputs Tab

Table 6.12 summarizes the **AES Inputs** tab available in DashBoard. Note that the number of AES inputs available depends on how the AES I/O Config is set on the Setup tab.

Table 6.12 AES Inputs Menu Items

Menu Title	Item	Parameters	Description
AES #	Sample Rate Conversion	Off	SRC is not used on an input. Select this option when using non-PCM audio data
		On*	SRC is used on an input
	Page	Reset	Resets the SRC setting to On for all AES inputs

AES Outputs Tabs

Table 6.13 summarizes the **AES Outputs** tab available in DashBoard. Note that the number of AES outputs available depends on how the AES I/O Config is set on the Setup tab.

Table 6.13 AES Outputs Menu Items

Menu Title	Item	Parameters	Description
AES #	Ch # Source	Mute	Configures the input source for the specified channel that is inserted in to the embedded group (if present)
		Group# Ch#	
		Analog #[a]	
		AES #	
		#Hz Tone	
		#kHz Tone	
	Ch # Gain (dB)	-20 to +20[b]	• Adjusts the gain of the specified channel of audio • Select 0 when using non-PCM audio data
	Channel Pair Gain Lock	Selected*	Locks the Gain slider of both channels together. If the values for the two channels are different, that change is maintained when the channels are locked.
		Cleared	Unlocks the Ch Gain sliders
	Ch # Delay (ms)	0* to 1000	Adjusts the delay of the specified audio channel
	Channel Pair Delay Lock	Selected*	Locks the Ch Delay slider of both channels together. If the values for the two channels are different, that change is maintained when the channels are locked.
		Cleared	Unlocks the Ch Delay sliders
	Ch # Invert	Selected	• Audio signal of the specified channel is not inverted • Use for non-PCM audio data
		Cleared*	The audio signal is not inverted
	Sum	Selected	Both channels will carry the average of the two input channels (A+B/2)
		Cleared*	Disables this feature
	Channel	Reset	Resets the settings for the selected input to the default values
	AES Page	Reset	Resets the indicated input settings to the default values

a. This option is only available for the SFS-8622-IC and SFS-8622-AIC.
b. The default value is 0.

Alarm Enables Tab

Table 6.14 summarizes the **Alarm Enables** options available in DashBoard.

Table 6.14 Alarms Menu Items

Menu Title	Item	Parameters	Description
Video Input & Reference Alarm	No Input	Selected*	SDI Status field reports a loss of input
		Cleared	Disables the alarm
	Invalid Input	Selected*	Input Format field reports when the input video is a format that is not accepted
		Cleared	Disables the alarm
	Incompatible Input	Selected*	Input Format field reports when the frame rate is not the same as the selected reference input
		Cleared	Disables the alarm
	Unlocked Input	Selected*	SDI Status field reports if the input becomes unlocked. This alarm can be caused due to a change of reference or video format.
		Cleared	Disables the alarm
	No Reference	Selected*	Reference Status field reports a loss of input conditions when they occur
		Cleared	Disables the alarm
Hardware	Incompat Rear Module	Selected*	HW Status field reports when a rear module is not compatible with the card
		Cleared	Disables the alarm
	Incompat Daughter Card	Selected*	This alarm is not implemented. Selecting or clearing this box has no effect.
		Cleared	
Embedded Input Audio - Group #	Group not present	Selected*	SDI Status field reports when a group is not present on the input
		Cleared	Disables the alarm
	Channel # Silent	Selected*	SDI Status field reports when the specified channel is detected as silent
		Cleared	Disables the alarm
AES Inputs - AES #	Input not present	Selected*	SDI Status field reports when the AES input is not detected
		Cleared	Disables the alarm
	Input Async	Selected*	Audio Status field in the General tab and the applicable AES field in the AES Inputs tab reports when the selected source is not synchronous to the input video or not a 48kHz sample rate
		Cleared	Disables the alarm

Table 6.14 Alarms Menu Items

Menu Title	Item	Parameters	Description
AES Inputs - AES #	Channel # Silent	Selected*	SDI Status field reports when the AES channel is detected as silent
		Cleared	Disables the alarm
AES Outputs - AES #	Source Missing	Selected*	Audio Status field reports when the input source assigned to the AES output is not detected
		Cleared	Disables this alarm
	Source Async	Selected*	Audio Status field reports when the selected source is not synchronous to the input video or not a 48kHz sample rate
		Cleared	Disables this alarm
Analog Outputs - Channel #	Source Missing	Selected*	Audio Status field reports when the input source assigned to the analog output is not detected
		Cleared	Disables this alarm
	Source Async	Selected*	Audio Status field reports when the selected source is not synchronous to the input video or not a 48kHz sample rate
		Cleared	Disables this alarm
Analog Inputs - Channel #	Silent	Selected*	Audio Status field reports when the specified channel is detected as silent
		Cleared	Disables the alarm
Embedded Output Audio - Group #	Source Missing	Selected*	Embedded Audio Status field reports when the selected source is not present or is silent
		Cleared	Disables the alarm
	Source Async	Selected*	Embedded Audio Status field reports when the selected source is not synchronous to the input video, or not a 48kHz sample rate
		Cleared	Disables the alarm
	SD 24Bit[a]	Selected*	Audio Status field reports when the selected configuration would embed 4 groups of 24bit audio in an SD output. Group 4 is down-sampled to 20bit audio.
		Cleared	Disables the alarm
	All Alarms	Set	Enables all alarms
	All Alarms	Clear	Disables all alarms

a. Note that when performing an analog to digital conversion of audio, the card produces 24bit resolution by default. When converting, ensure that you set the **SD Audio** option in the **Setup** tab to **20bit**. Otherwise, the card will output 24bit and an alarm is reported in the **Audio Status** field.

Specifications

In This Chapter

This chapter provides technical specification details. Note that specifications are subject to change without notice.

The following topics are discussed:

- Technical Specifications
- Channel Status Data Table

Technical Specifications

This section provides the technical specifications for the SFS-8622 series cards. Note that not all inputs and outputs outlined here are available for all card models.

For More Information on...

- the inputs and outputs for your card, refer to the **Table 1.1** on page 1-2.

SDI Input

Table 7.1 SDI Input Technical Specifications

Parameter	Specification
Number of Inputs	1
SDI Data Rates and SMPTE Standards Accommodated	SMPTE 259M, SMPTE 292M, SMPTE 424M
Impedance	75ohm
Return Loss	>15dB to 1.5GHz >10dB to 3.00GHz
Equalization (Belden 1694A cable)	SD: < 450m (1476ft) HD: < 170m (558ft) 3G: < 100m (328ft)
Connector Type	BNC

SDI Outputs

Table 7.2 SDI Outputs Technical Specifications

Parameter	Specification
Number of Outputs	2
SDI Data Rates and SMPTE Standards Accommodated	SMPTE 259M, SMPTE 292M, SMPTE 424M
Impedance	75ohm
Return Loss	>15dB to 1.5GHz >10dB to 3GHz
Signal Level	800mV, +/- 10%
DC Offset	<50mV
Rise and Fall Time (20-80%)	SD: 600ps typical HD: 120ps typical 3G: 130ps typical
Overshoot	<10%
Connector Type	BNC

AES Inputs

Table 7.3 AES Inputs Technical Specifications

Parameter	Specification
Standards Accommodated	AES-3id-2001, AES3
Impedance	75ohm
Minimum Input	50mV p-p
Maximum Input	2.5V p-p @ 48kHz 1.5V p-p @ 96kHz
Minimum Audio Delay	SRC on: 1.35mS SRC off: 0.37mS
Sampling Rate	48kHz compliant with AES-3id or any rate from 32kHz to 96kHz with SRC on
Equalization	up to 800m (2,400ft) @ 48kHz up to 500m (1,500ft) @ 96kHz
Connector Type	BNC

AES Outputs

Table 7.4 AES Outputs Technical Specifications

Parameter	Specification
Standards Accommodated	AES-3id-2001, AES3
Impedance	75ohm
Output Level	1V p-p
Sampling Rate	48kHz
Connector Type	BNC

Analog Inputs

Table 7.5 Analog Inputs Technical Specifications

Parameter	Specification
Input Impedance	> 10KΩ
Maximum Input Level	+ 24dBu
Input Level Adjustment	± 10dBu
Frequency Response	± 0.07dB 22Hz to 20kHz @ Fs = 48kHz
Signal to Noise Ratio	-96dB -98dB ‘A’ weighted -104dB CCITT weighting
THD	> -97dB or < 0.002%
Phase Linearity	< 1°
Amplitude Linearity	< 0.6dB @ -100dBFS
Crosstalk	-95dB

Analog Outputs

Table 7.6 Analog Outputs Technical Specifications

Parameter	Specification
Maximum Output Level	+ 27dBu
Frequency Response	± 0.07dB 22Hz to 20Hz @ Fs = 48kHz
Signal to Noise Ratio	-90dB
THD	> -76dB
Amplitude Linearity	< 0.5dB @ -100dBFS
Crosstalk	<-80dB (20Hz to 20kHz)

Environmental

Table 7.7 Environmental Specifications

Parameter	Specification
Operating Range	5°C to 40°C ambient

Total Power Consumption

Table 7.8 Power Specifications

Parameter	Specification
SFS-8622-A	8W
SFS-8622-B	11W
SFS-8622-IC	11W
SFS-8622-OC	9W
SFS-8622-AIC	10W
SFS-8622-AOC	9W

Channel Status Data Table

Table 7.9 shows the channel status bit information that is used for all output audio.

Table 7.9 Channel Status Data

Byte	Bit	Function	Transmitted
0	0	Professional or Consumer use of Channel Status Block	Professional (1)
	1	Normal Audio or Non-Audio Mode	Normal Audio (0)
	2-4	Emphasis	No Emphasis (100)
	5	Lock Indication	Locked (0)
	6-7	Sampling Rate	48kHz (01)
1	0-3	Channel Mode	2 channel stereo (0001)
	4-7	User Bit Mode	192-bit (0001)
2	0-2	Auxiliary Bit Usage	20-bit audio sample, Aux bits undefined (000)
	3-5	Sample Word Length	20- or 24-bits (101)
	6-7	Alignment Level	Not Indicated (00)
3	0-7	Multi-channel Modes	Undefined (0)
4	0-1	Digital Audio Reference Signal	Not a Reference (0)
	2	Reserved	0
	3-6	Sampling Frequency	Not Indicated (0000)
	7	Sampling Frequency Scaling Flag	No Scaling (0)
5	0-7	Reserved	Unused (0)
6-9		ASCII Source ID	Unused (0)
10-13		ASCII Destination ID	Unused (0)
14-17		Local Sample Address	Unused (0)
18-21		Time of Day	Unused (0)
22	0-7	C Data Reliability	Only the first 5 Status Bytes are marked as Reliable All other Status Bytes are marked as Unreliable
23	0-7	CRC	Calculated CRC

Passing the Status Bytes

The card replaces Channel Status Bytes according to **Table 7.9** or passes Status Bytes through from input to output. The following conditions must be met for Status Bytes to pass:

- AES inputs must be 48kHz synchronous
- SRC is set to OFF
- Data Word Length in the Channel Status Bytes must match what is embedded

Service Information

In This Chapter

This chapter contains the following sections:

- Troubleshooting Checklist
- Warranty and Repair Policy

Troubleshooting Checklist

Routine maintenance to this openGear product is not required. In the event of problems with your card, the following basic troubleshooting checklist may help identify the source of the problem. If the frame still does not appear to be working properly after checking all possible causes, please contact your openGear products distributor, or the Technical Support department at the numbers listed under the "**Contact Us**" section.

1. **Visual Review** — Performing a quick visual check may reveal many problems, such as connectors not properly seated or loose cables. Check the card, the frame, and any associated peripheral equipment for signs of trouble.
2. **Power Check —** Inspect the power indicator LED on the distribution frame front panel for the presence of power. If the power LED is not illuminated, verify that the power cable is connected to a power source and that power is available at the power main. Confirm that the power supplies are fully seated in their slots. If the power LED is still not illuminated, replace the power supply with one that is verified to work.
3. **Input Signal Status** — Verify that source equipment is operating correctly and that a valid signal is being supplied.
4. **Output Signal Path** — Verify that destination equipment is operating correctly and receiving a valid signal.
5. **Unit Exchange** — Exchanging a suspect unit with a unit that is known to be working correctly is an efficient method for localizing problems to individual units.

Bootload Button

In the unlikely event of a complete card failure, you may be instructed by a Ross Technical Support specialist to perform a complete software reload on the card.

To reload the software on the card

1. Eject the card from the frame.
2. Press and hold the **Bootload** button, while re-inserting the card into the frame.
3. Release the button.
   - The **OK/ERROR** LED flashes green while the card is waiting for a new software load.
   - If a new software load is not sent to the card within 60 seconds, the card will attempt to re-start with its last operational software load.
   - Software loads can be sent to the card via the connection on the rear of the frame.

Warranty and Repair Policy

The SFS-8622 series card is warranted to be free of any defect with respect to performance, quality, reliability, and workmanship for a period of FIVE (5) years from the date of shipment from our factory. In the event that your card proves to be defective in any way during this warranty period, Ross Video Limited reserves the right to repair or replace this piece of equipment with a unit of equal or superior performance characteristics.

Should you find that this card has failed after your warranty period has expired, we will repair your defective product should suitable replacement components be available. You, the owner, will bear any labor and/or part costs incurred in the repair or refurbishment of said equipment beyond the FIVE (5) year warranty period.

In no event shall Ross Video Limited be liable for direct, indirect, special, incidental, or consequential damages (including loss of profits) incurred by the use of this product. Implied warranties are expressly limited to the duration of this warranty.

This User Manual provides all pertinent information for the safe installation and operation of your openGear product. Ross Video policy dictates that all repairs to the card are to be conducted only by an authorized Ross Video Limited factory representative. Therefore, any unauthorized attempt to repair this product, by anyone other than an authorized Ross Video Limited factory representative, will automatically void the warranty. Please contact Ross Video Technical Support for more information.

In Case of Problems

Should any problem arise with your card, please contact the Ross Video Technical Support Department. (Contact information is supplied at the end of this publication.)

A Return Material Authorization number (RMA) will be issued to you, as well as specific shipping instructions, should you wish our factory to repair your card. If required, a temporary replacement frame will be made available at a nominal charge. Any shipping costs incurred will be the responsibility of you, the customer. All products shipped to you from Ross Video Limited will be shipped collect.

The Ross Video Technical Support Department will continue to provide advice on any product manufactured by Ross Video Limited, beyond the warranty period without charge, for the life of the equipment.

Contact Us

Contact our friendly and professional support representatives for the following:

- Name and address of your local dealer
- Product information and pricing
- Technical support
- Upcoming trade show information

Technical Support	Telephone:	+1 613 • 652 • 4886
	After Hours Emergency:	+1 613 • 349 • 0006
	Email:	techsupport@rossvideo.com
General Information	Telephone:	+1 613 • 652 • 4886
	Fax:	+1 613 • 652 • 4425
	Email:	solutions@rossvideo.com
	Website:	http://www.rossvideo.com

Visit Us

Visit our website for:

- Company information and news
- Related products and full product lines
- Online catalog
- Testimonials